


Specifications:


No. of Contacts	4, 5, 6, 7
Withstanding Voltage	AC 500V for a minute
Current Rating	2A
Insulation Resistance	MIN. 1000Mohm
Contact Resistance	MAX. 10mohm



- Note 1. The contact arrangement shown here is the front view of the connector
 2. The withstanding voltage shown here is test voltage value.
 3. The insulation resistance value is measured at DC100V.
 4. The contact resistance value is measured at DC1A.

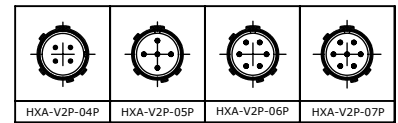

Mechanical drawing:

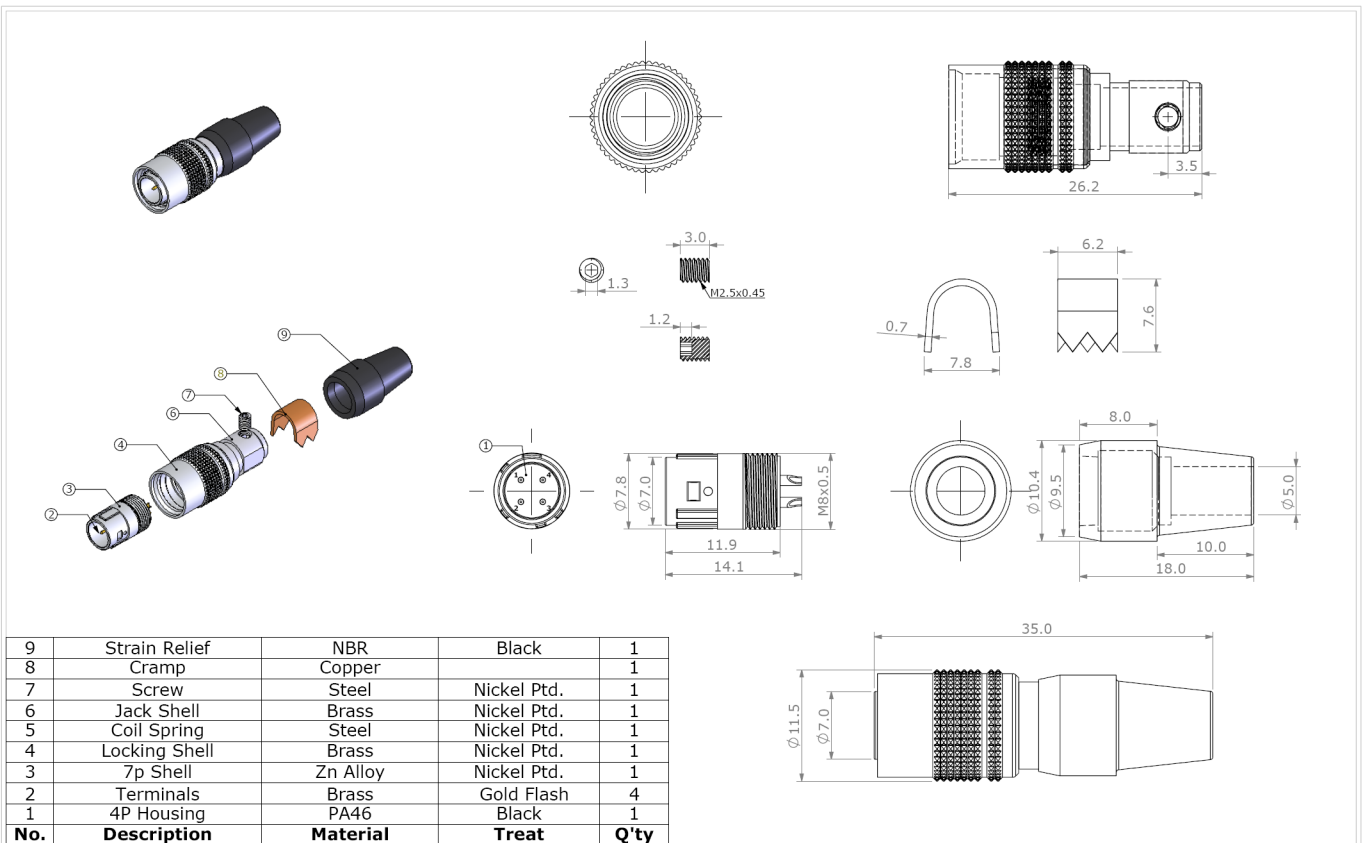

9	Strain Relief	NBR	Black	1
8	Cramp	Copper		1
7	Screw	Steel	Nickel Ptd.	1
6	Jack Shell	Brass	Nickel Ptd.	1
5	Coil Spring	Steel	Nickel Ptd.	1
4	Locking Shell	Brass	Nickel Ptd.	1
3	7p Shell	Zn Alloy	Nickel Ptd.	1
2	Terminals	Brass	Gold Flash	4
1	4P Housing	PA46	Black	1
No.	Description	Material	Treat	Q'ty

俞昌有限公司 YEU TSANG CO. LTD.		品名: ITEM:	4P HXA V2P MALE		Tolerance: .X +/-0.25 .XX +/-0.10	SHEET: 1 1	單位: unit:	mm	日期: date:	'12/03/22	繪圖: dwn by:	DanielShyr
		料號: PART NO.	HXA-V2P-04P				圖號: DRW NO.	比例: scale:	2:1	版本: version:	V. 1.0	核准: aprvid by:

COPYRIGHT BY YEU TSANG

Initial	Date
---------	------

tolerance X: ±0.5 mm .X: ±0.25 mm .XX: ±0.10 mm
 applicable unless otherwise indicated in specification or on drawings