



# YE-115XR DIN CABLE PLUG ASS'Y TYPE RIGHT ANGLE



## SPECIFICATION :

1. SHELL COVER : PA6
2. SCRWE CAP : PA6
3. SHIELD COVER A : STEEL NICKEL PTD.
4. SHIELD COVER B : STEEL NICKEL PTD.
5. "O" RING : BRASS NICKEL PTD.
6. HOUSING : ABS
7. TERMINALS : BRASS SILVER PTD.

## SPECIFICATION :

Rating : 100V AC 1A max.


Contact Resistance :

Pins 30mΩ max.

Shell 50mΩ max.

Insulation Resistance :  
100MΩ at 500V DC min.

Voltage Withstand :  
250V AC for 1 minute

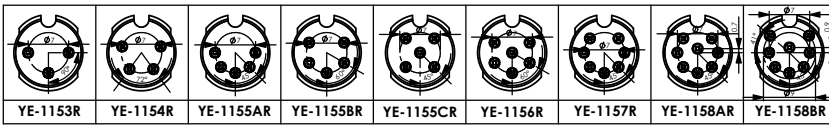

YE-1153R



YE-1154R



YE-1155AR



YE-1155BR



YE-1155CR



YE-1156R



YE-1157R



YE-1158AR



YE-1158BR