

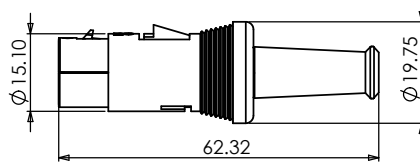


# YE-118X DIN CABLE PLUG PUSH LOCKING ASS'Y

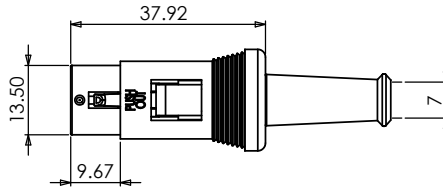

## MATERIAL:

1. SHELL COVER : PA6
2. STRAIN BOOT: PVC
3. SHIELD COVER A : STEEL NICKEL PTD.
4. SHIELD COVER B : STEEL NICKEL PTD.
5. SPRING HOOK : STEEL NICKEL PTD.
6. HOUSING : ABS
7. TERMINALS : BRASS SILVER PTD.

## SPECIFICATION :

Rating : 100V AC 1A max.

Contact Resistance :

Pins 30mΩ max.

Shell 50mΩ max.

Insulation Resistance :

100MΩ at 500V DC min.

Voltage Withstand :

250V AC for 1 minute



YE-1183



YE-1184



YE-1185A



YE-1185B



YE-1185C



YE-1186



YE-1187



YE-1188A



YE-1188B