




YE-118XS DIN CABLE JACK PUSH LOCKING ASS'Y

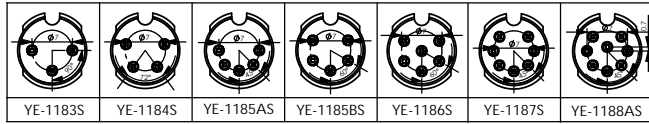

SECTION A-A

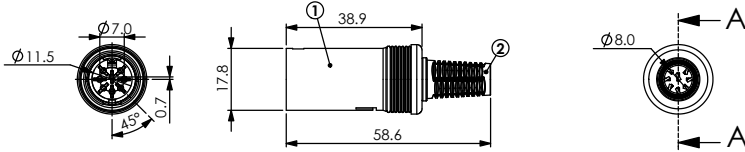

MATERIAL:

1. SHELL COVER : PA6
2. STRAIN BOOT: PVC
3. SHIELD COVER A : STEEL NICKEL PTD.
4. SHIELD COVER B : STEEL NICKEL PTD.
5. HOUSING : ABS
6. TERMINALS : COPPER SILVER PTD.

SPECIFICATION :

Rating : 100V AC 1A max.

Contact Resistance :

Pins 30mΩ max.

Shell 50mΩ max.

Insulation Resistance :

100MΩ at 500V DC min.

Voltage Withstand :

250V AC for 1 minute



YE-1183S



YE-1184S



YE-1185AS



YE-1185BS



YE-1186S



YE-1187S



YE-1188AS