
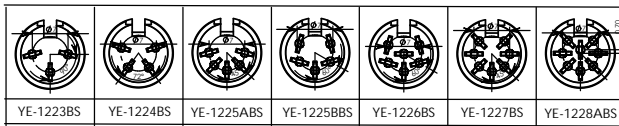
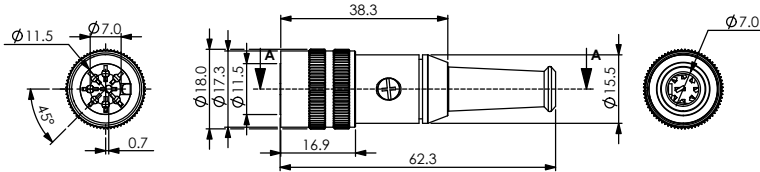


# YE-122XBS DIN CABLE JACK METAL SHIELD SCREW LOCKING ASS'Y



## MATERIAL :

1. SHELL COVER : BRASS NICKEL PTD.
2. SCREW CAP : BRASS NICKEL PTD.
3. "T" HOLDER : STEEL NICKEL PTD.
4. SPRING : STEEL NICKEL PTD.
5. SETSCREW : STEEL NICKEL PTD.
6. STRAIN BOOT : PVC
7. HOUSING : PA66
8. TERMINALS : BRASS SILVER PTD.

## SPECIFICATION :

Rating : 100V AC 1A max.

Contact Resistance :

Pins 30m $\Omega$  max.

Shell 50m $\Omega$  max.

Insulation Resistance :

100M $\Omega$  at 500V DC min.

Voltage Withstand :

250V AC for 1 minute



YE-1223BS



YE-1224BS



YE-1225ABS



YE-1225BBS



YE-1226BS



YE-1227BS



YE-1228ABS