
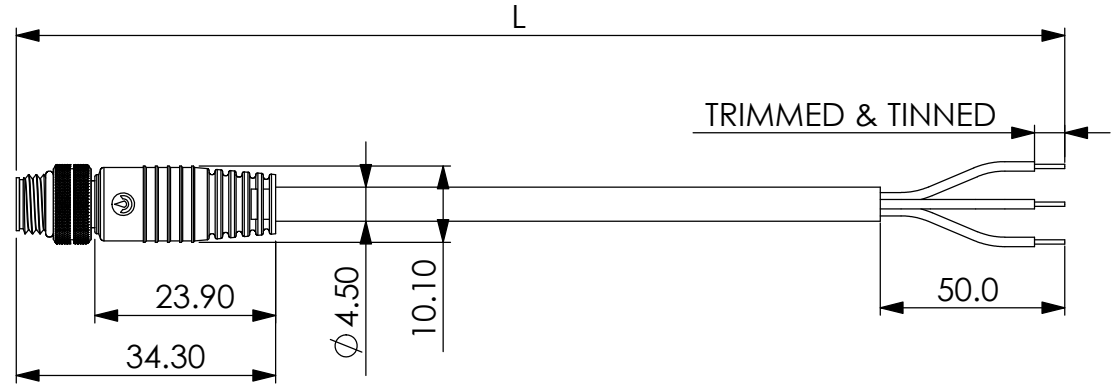


**Contact assignment :**

- Brown ————— 1
- White ————— 2
- Blue ————— 3
- Black ————— 4



**TECHNICAL SPECIFICATION :**

- Connector locking system : screw M8x1.0
- Termination : solder
- Wire gauge : AWG 24
- Cable outlet : 4.5mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 20°C
- Rated voltage : 30V
- Rated current(40°C) : 4A
- Contact resistance : ≤ 3mΩ

**MATERIALS :**

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU




Part No.	Description	Length : L	Cable
CWP1204PMR-U02	-	2M	PU , Black 4 x AWG24
-	-	-	
CWP1204PMR-U05	-	5M	
-	-	-	



**俞昌有限公司**  
*Yeu Tsang Co. Ltd.*

品名: **WATER PROOF CABLE ASS'Y**  
ITEM : **M8 4P PLUG PU CABLE**

料號: \_\_\_\_\_ 圖號: \_\_\_\_\_  
PART NO. \_\_\_\_\_ DRW NO. \_\_\_\_\_



一般公差  
.X +/-0.25  
.XX +/-0.10

SHEET:  
1  
1

單位: mm  
unit: mm  
比例: 1:1  
scale: 1:1

日期: '08/01/23  
date:  
版本: V. 1.0  
version:

繪圖: DanielShyr  
drwn by:  
核准: SkyShyr  
aprld by: