
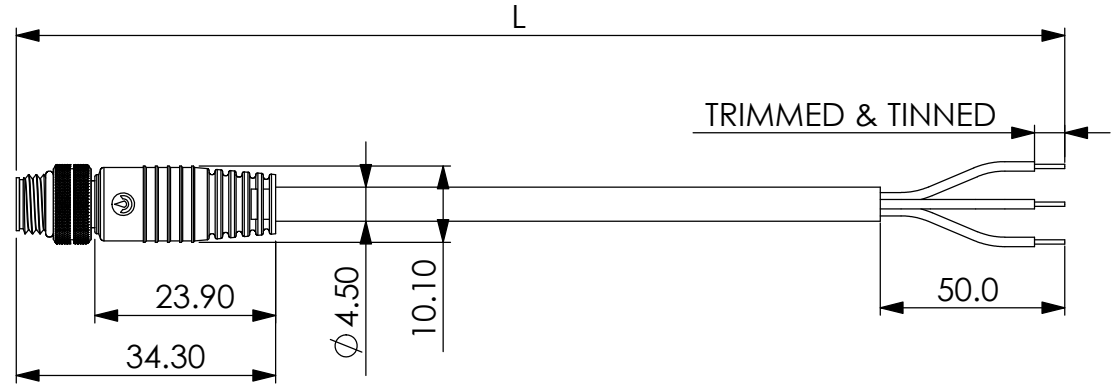


Contact assignment :

- Brown ————— 1
- White ————— 2
- Blue ————— 3
- Black ————— 4



TECHNICAL SPECIFICATION :

- Connector locking system : screw M8x1.0
- Termination : solder
- Wire gauge : AWG 24
- Cable outlet : 4.5mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 20°C
- Rated voltage : 30V
- Rated current(40°C) : 4A
- Contact resistance : ≤ 3mΩ

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PVC




Part No.	Description	Length : L	Cable
CWP1204PMR-V02	-	2M	PVC , Black 4 x AWG24
-	-	-	
CWP1204PMR-V05	-	5M	
-	-	-	



俞昌有限公司
Yeu Tsang Co. Ltd.

品名: ITEM :	WATER PROOF CABLE ASS'Y M8 4P PLUG PVC CABLE		
料號: PART NO.	圖號: DRW NO.		



一般公差	SHEET:
.X +/-0.25	1 1
.XX +/-0.10	

單位: unit:	mm
比例: scale:	1 : 1

日期: date:	'08/01/23
版本: version:	V. 1.0

繪圖: drwn by:	DanielShyr
核准: aprld by:	SkyShyr

日期: date:	'08/01/23
版本: version:	V. 1.0

繪圖: drwn by:	DanielShyr
核准: aprld by:	SkyShyr

日期: date:	'08/01/23
版本: version:	V. 1.0