
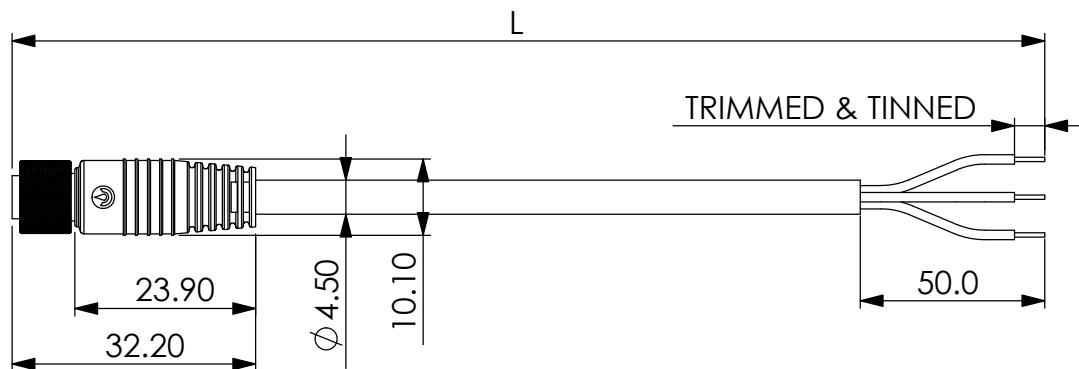


Contact assignment :

- | | |
|-------|---|
| Brown | 1 |
| White | 2 |
| Blue | 3 |
| Black | 4 |



TECHNICAL SPECIFICATION :

Connector locking system :	screw M8x1.0
Termination :	solder
Wire gauge :	AWG 24
Cable outlet :	4.5mm
Degree of protection :	IP67,in mated condition
Mechanical operation :	>100 mating cycles
Upper temperature :	+80°C
lower temperature :	- 20°C
Rated voltage :	30V
Rated current(40°C) :	4A
Contact resistance :	$\leq 3\text{m}\Omega$

MATERIALS :

Contact :	Brass
Contact plating :	Nickel 50μ / Gold 10μ
Housing :	PBT + 30% GF.
Coupling nut :	Brass , Nickel plated
Moulding body :	PVC



Part No.	Description	Length : L	Cable
CWP1204JMR-V02	-	2M	PVC , Black 4 x AWG24
-	-	-	
CWP1204JMR-V05	-	5M	PVC , Black 4 x AWG24
-	-	-	



渝昌有限公司
Yeu Tsang Co. Ltd.

品名: ITEM:	WATER PROOF CABLE ASS'Y M8 4P JACK PVC CABLE			一般公差 .X +/-0.25 .XX +/-0.10	SHEET: 1 1	單位: unit: mm	日期: date: '08/01/23	繪圖: drwn by: DanielShyr
料號: PART NO.		圖號: DRW NO.			比例: scale: 1 : 1	版本: version: V. 1.0	核准: aprvld by: SkyShyr	