



Contact assignment :

- Brown ————— 1
- White ————— 2
- Blue ————— 3
- Black ————— 4

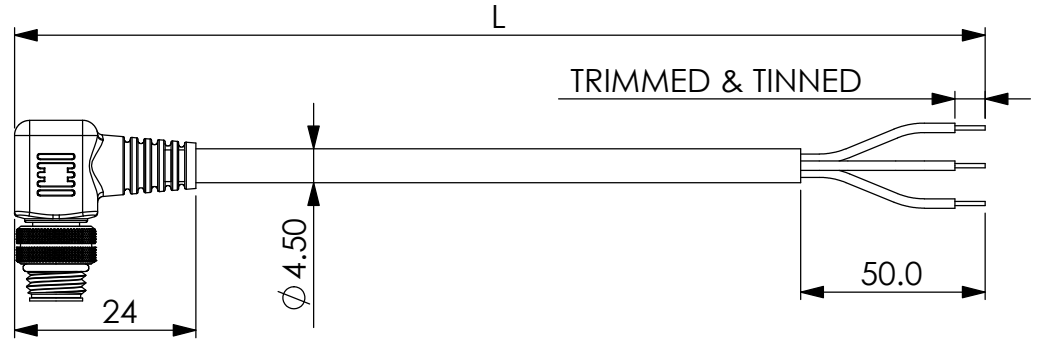


TECHNICAL SPECIFICATION :

- Connector locking system : screw M8x1.0
- Termination : solder
- Wire gauge : AWG 24
- Cable outlet : 4.5mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 20°C
- Rated voltage : 30V
- Rated current(40°C) : 4A
- Contact resistance : ≤3mΩ

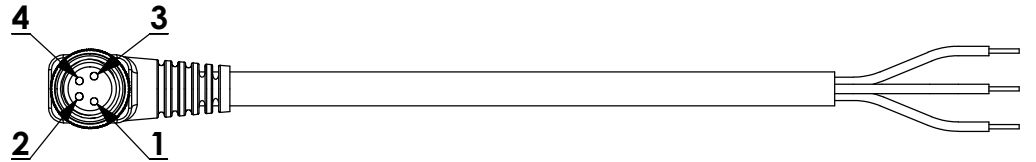

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU

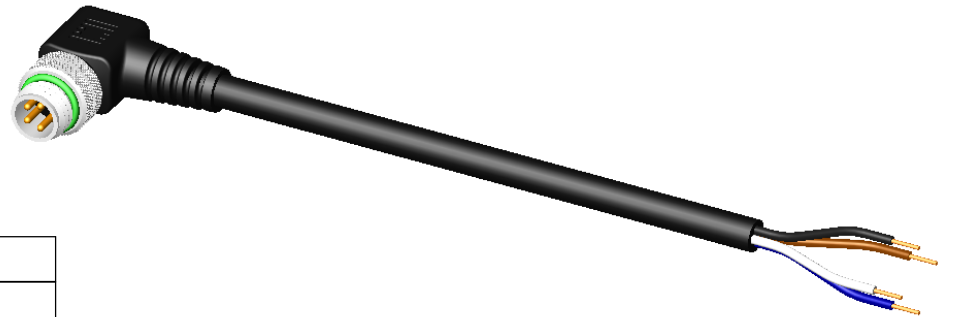

Part No.	Description	Length : L	Cable
CWP1204PMR-RAU02	-	2M	PU , Black 4 x AWG24
-	-	-	
CWP1204PMR-RAU05	-	5M	
-	-	-	




俞昌有限公司
Yeu Tsang Co. Ltd.

品名: WATER PROOF CABLE ASS'Y
ITEM: M8 4P PLUG PU CABLE

料號: PART NO.

圖號: DRW NO.



一般公差
.X +/-0.25
.XX +/-0.10

SHEET:
1
1

單位: mm
unit: mm
比例: 1:1
scale: 1:1

日期: '08/01/23
date: '08/01/23
版本: V. 1.0
version: V. 1.0

繪圖: DanielShyr
drwn by: DanielShyr
核准: SkyShyr
aprVld by: SkyShyr