



Contact assignment :

- Brown ————— 1
- White ————— 2
- Blue ————— 3
- Black ————— 4

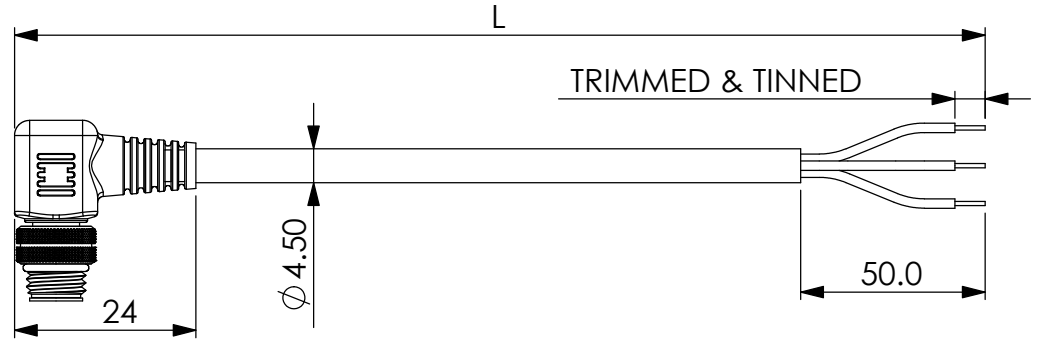


TECHNICAL SPECIFICATION :

- Connector locking system : screw M8x1.0
- Termination : solder
- Wire gauge : AWG 24
- Cable outlet : 4.5mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 20°C
- Rated voltage : 30V
- Rated current(40°C) : 4A
- Contact resistance : ≤3mΩ

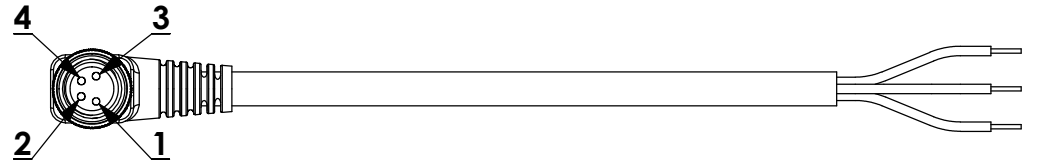

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PVC

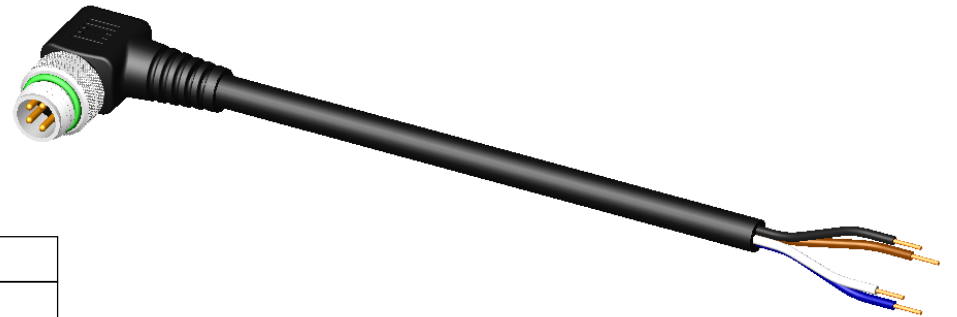

Part No.	Description	Length : L	Cable
CWP1204PMR-RAV02	-	2M	PVC , Black 4 x AWG24
-	-	-	
CWP1204PMR-RAV05	-	5M	
-	-	-	




俞昌有限公司
Yeu Tsang Co. Ltd.

品名:
ITEM :
料號:
PART NO.

**WATER PROOF CABLE ASS'Y
M8 4P PLUG PVC CABLE**

圖號:
DRW NO.



一般公差
.X +/-0.25
.XX +/-0.10

SHEET:
1
1

單位:
unit:
比例:
scale:

mm
1 : 1

日期:
date:
版本:
version:

'08/01/23
V. 1.0

繪圖:
drwn by:
核准:
aprId by:

DanielShyr
SkyShyr