

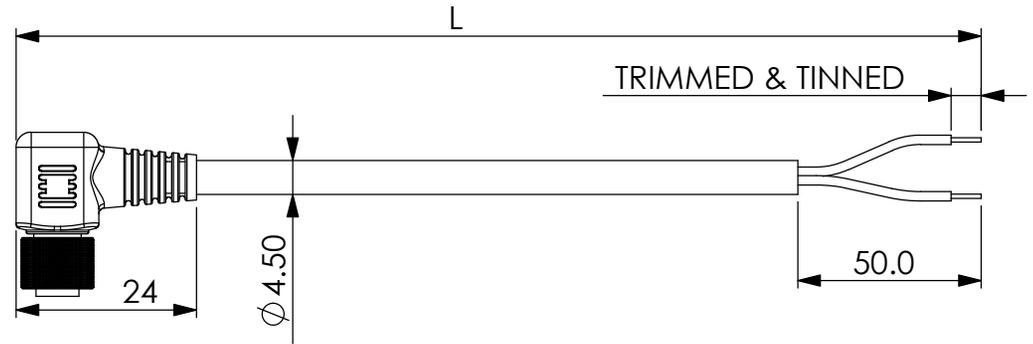


**Contact assignment :**

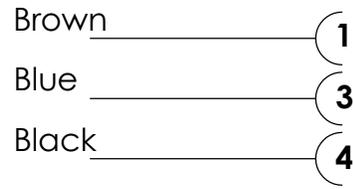

**TECHNICAL SPECIFICATION :**

Connector locking system : screw M8x1.0  
 Termination : solder  
 Wire gauge : AWG 24  
 Cable outlet : 4.5mm  
 Degree of protection : IP67, in mated condition  
 Mechanical operation : > 100 mating cycles  
 Upper temperature : +80°C  
 lower temperature : - 20°C  
 Rated voltage : 60V  
 Rated current(40°C) : 4A  
 Contact resistance : ≤ 3mΩ

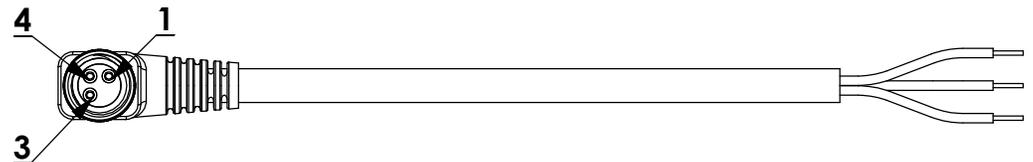

**MATERIALS :**


Contact : Brass  
 Contact plating : Nickel 50μ / Gold 10μ  
 Housing : PBT + 30% GF.  
 Coupling nut : Brass , Nickel plated  
 Moulding body : PU

Part No.	Description	Length : L	Cable
CWP1203JMR-RAU02	-	2M	PU , Black 3 x AWG24
-	-	-	
CWP1203JMR-RAU05	-	5M	PU , Black 3 x AWG24
-	-	-	



**俞昌有限公司**  
*Yeu Tsang Co. Ltd.*

品名: **WATER PROOF CABLE ASS'Y**  
 ITEM: **M8 3P R/A JACK PU CABLE**  
 料號: PART NO.  
 圖號: DRW NO.



一般公差  
 .X +/-0.25  
 .XX +/-0.10

SHEET:  
 1  
 1

單位: mm  
 unit: mm  
 比例: 1:1  
 scale: 1:1

日期: '08/01/23  
 date: '08/01/23  
 版本: V. 1.0  
 version: V. 1.0

繪圖: DanielShyr  
 drwn by: DanielShyr  
 核准: SkyShyr  
 aprvd by: SkyShyr