



Contact assignment :

- Brown ————— 1
- White ————— 2
- Blue ————— 3
- Black ————— 4

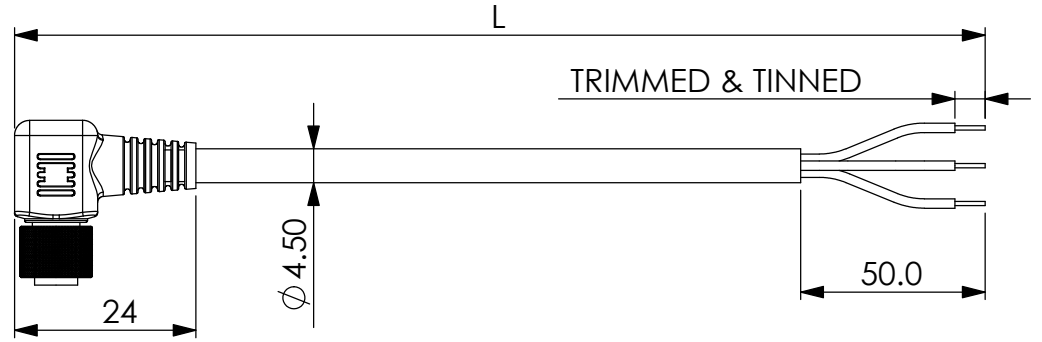


TECHNICAL SPECIFICATION :

Connector locking system : screw M8x1.0
 Termination : solder
 Wire gauge : AWG 24
 Cable outlet : 4.5mm
 Degree of protection : IP67, in mated condition
 Mechanical operation : > 100 mating cycles
 Upper temperature : +80°C
 lower temperature : - 20°C
 Rated voltage : 30V
 Rated current(40°C) : 4A
 Contact resistance : ≤3mΩ

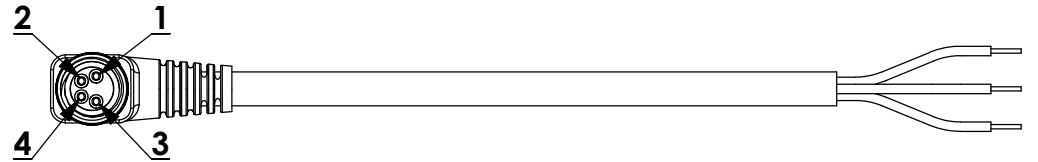

MATERIALS :

Contact : Brass
 Contact plating : Nickel 50μ / Gold 10μ
 Housing : PBT + 30% GF.
 Coupling nut : Brass , Nickel plated
 Moulding body : PU

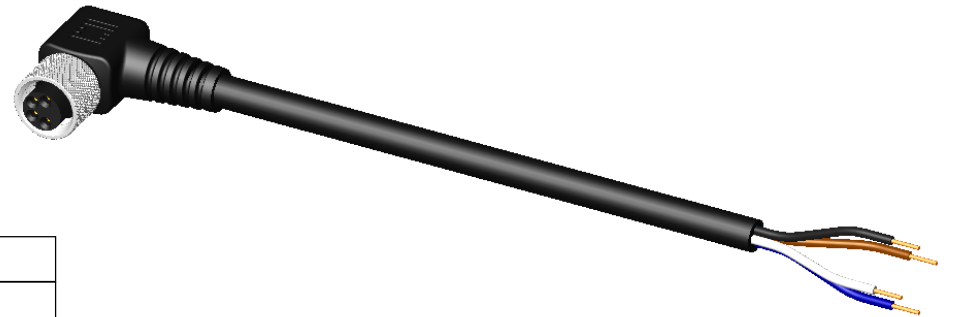

| Part No. | Description | Length : L | Cable |
|------------------|-------------|------------|-------------------------|
| CWP1204JMR-RAU02 | - | 2M | PU , Black 4 x AWG24 |
| - | - | - | |
| CWP1204JMR-RAU05 | - | 5M | |
| - | - | - | |




俞昌有限公司
Yeu Tsang Co. Ltd.

品名:
ITEM :
料號:
PART NO.

**WATER PROOF CABLE ASS'Y
 M8 4P JACK PU CABLE**

圖號:
DRW NO.



一般公差
.X +/-0.25
.XX +/-0.10

SHEET:
1
1

單位:
unit:
比例:
scale:

mm
1 : 1

日期:
date:
版本:
version:

'08/01/23
V. 1.0

繪圖:
drwn by:
核准:
aprVld by:

DanielShyr
SkyShyr