
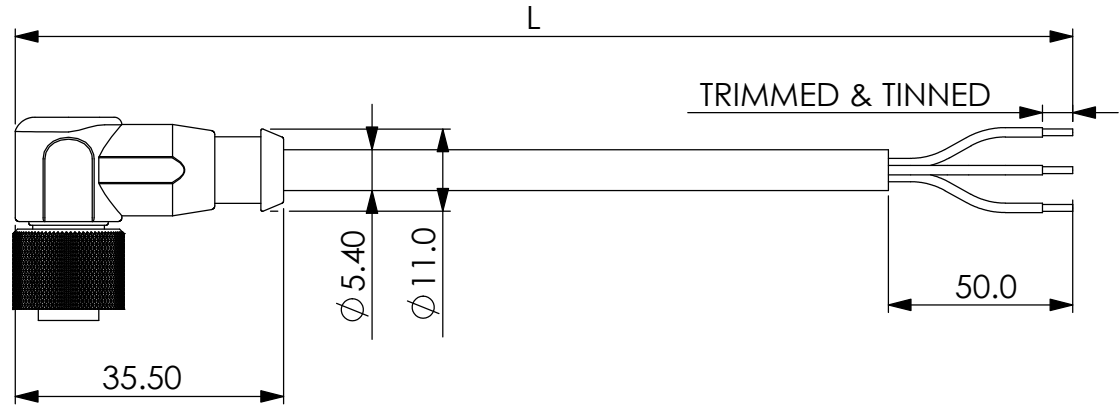


Contact assignment :

- Brown ——— ①
- White ——— ②
- Blue ——— ③
- Black ——— ④



TECHNICAL SPECIFICATION :

- Connector locking system : screw M12x1.0
- Termination : solder
- Wire gauge : AWG 22
- Cable outlet : 5.4mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 25°C
- Rated voltage : 250V
- Rated current(40°C) : 4A
- Contact resistance : ≤3mΩ

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU




Part No.	Description	Length : L	Cable
CWP1204JMR-RA02	-	2M	PU , Black 4 x AWG22
CWP1204JMR-RA03	-	3M	
CWP1204JMR-RA05	-	5M	
CWP1204JMR-RA10	-	10M	



俞昌有限公司
Yeu Tsang Co., Ltd.

品名: ITEM :	WATER PROOF CABLE ASS'Y M12 4P R/A JACK PU CABLE	
料號: PART NO.	圖號: DRW NO.	



一般公差
.X +/-0.25
.XX +/-0.10

SHEET:
1
1

單位:
unit: mm
比例:
scale: 1:1

日期:
date: '08/01/23
版本:
version: V. 1.0

繪圖:
drwn by: DanielShyr
核准:
aprVld by: SkyShyr