
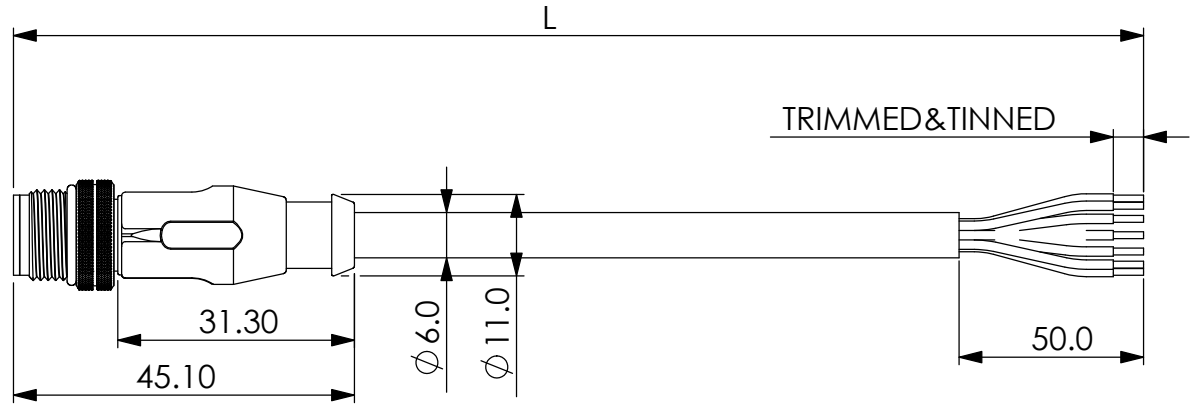


Contact assignment :

- White ————— ①
- Brown ————— ②
- Green ————— ③
- Yellow ————— ④
- Grey ————— ⑤
- Pink ————— ⑥
- Blue ————— ⑦
- Red ————— ⑧



TECHNICAL SPECIFICATION :

- Connector locking system : screw M12x1.0
- Termination : solder
- Wire gauge : AWG 24
- Cable outlet : 6.0mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 25°C
- Rated voltage : 30V
- Rated current(40°C) : 2A
- Contact resistance : ≤ 3mΩ

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU




Part No.	Description	Length : L	Cable
CWP1208PMR-02	-	2M	PU , Black 8 x AWG24
CWP1208PMR-03	-	3M	
CWP1208PMR-05	-	5M	
CWP1208PMR-10	-	10M	



俞昌有限公司
Yeu Tsang Co. Ltd.

品名: ITEM :	WATER PROOF CABLE ASS'Y M12 8P PLUG PU CABLE	
料號: PART NO.	圖號: DRW NO.	



一般公差	SHEET:	單位: unit:	mm	日期: date:	'08/01/23	繪圖: drwn by:	DanielShyr
.X +/-0.25 .XX +/-0.10	① ①	比例: scale:	1 : 1	版本: version:	V. 1.0	核准: aprld by:	SkyShyr