
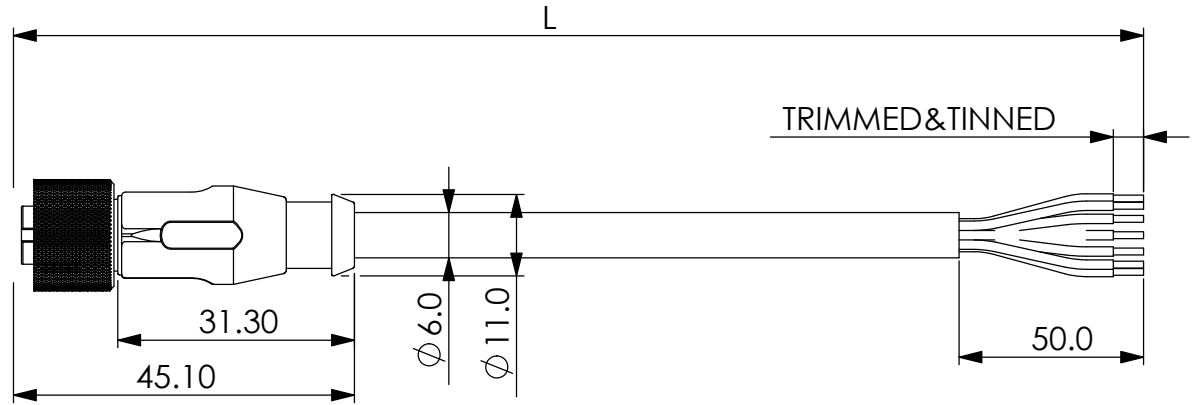


**Contact assignment :**

- White \_\_\_\_\_ ①
- Brown \_\_\_\_\_ ②
- Green \_\_\_\_\_ ③
- Yellow \_\_\_\_\_ ④
- Grey \_\_\_\_\_ ⑤
- Pink \_\_\_\_\_ ⑥
- Blue \_\_\_\_\_ ⑦
- Red \_\_\_\_\_ ⑧



**TECHNICAL SPECIFICATION :**

- Connector locking system : screw M12x1.0
- Termination : solder
- Wire gauge : AWG 24
- Cable outlet : 6.0mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 25°C
- Rated voltage : 30V
- Rated current(40°C) : 2A
- Contact resistance : ≤ 3mΩ

**MATERIALS :**

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU




Part No.	Description	Length : L	Cable
CWP1208JMR-02	-	2M	PU , Black 8 x AWG24
CWP1208JMR-03	-	3M	
CWP1208JMR-05	-	5M	
CWP1208JMR-10	-	10M	



**俞昌有限公司**  
*Yeu Tsang Co. Ltd.*

品名: ITEM :	<b>WATER PROOF CABLE ASS'Y M12 8P JACK PU CABLE</b>	
料號: PART NO.	圖號: DRW NO.	



一般公差	SHEET:
.X +/-0.25	1
.XX +/-0.10	1

單位: unit:	mm
比例: scale:	1 : 1

日期: date:	'08/01/23
版本: version:	V. 1.0

繪圖: drwn by:	DanielShyr
核准: aprld by:	SkyShyr