
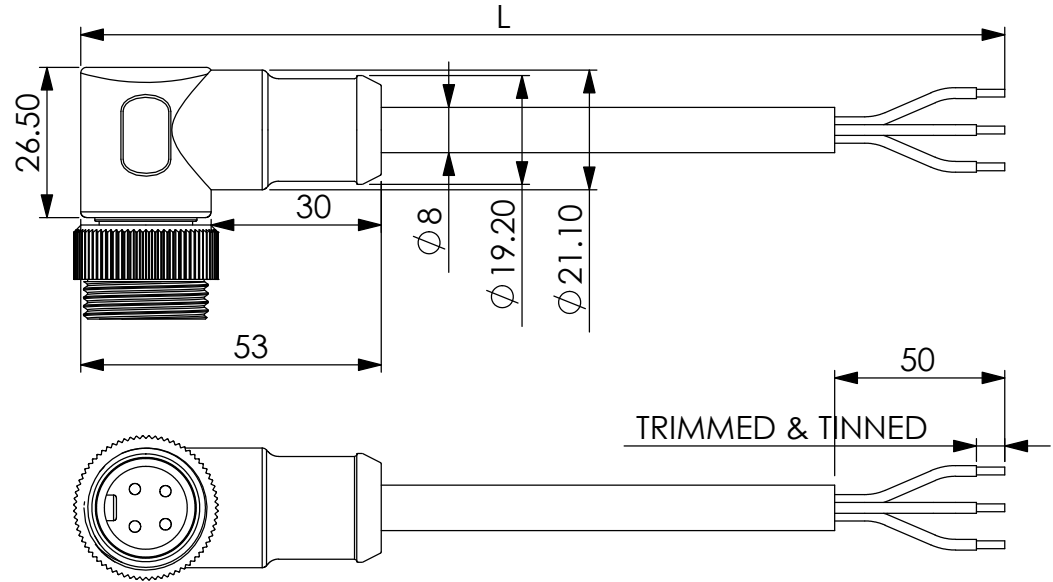


Contact assignment :

- Brown ————— 1
- Grey ————— 2
- Blue ————— 3
- Black ————— 4



TECHNICAL SPECIFICATION :




- Connector locking system : screw 7/8"-16UN
- Termination : solder
- Wire gauge : AWG 16
- Cable outlet : 8.0mm
- Degree of protection : IP68
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 25°C
- Rated voltage : 300V
- Rated current(40°C) : 9A
- Contact resistance : $\leq 3m\Omega$

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50 μ / Gold 10 μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU



Part No.	Description	Length:L	Cable
CWP2204PMR-RA02G	-	2M	PU , Black 5 x AWG16

 俞昌有限公司 YEU TSANG CO. LTD.	品名: ITEM :	WATER PROOF CABLE ASS'Y M22 4P R/A PLUG PU CABLE		 一般公差 .X +/-0.25 .XX +/-0.10	SHEET: 	單位: unit:	mm	日期: date:	'08/01/23	繪圖: drwn by:	DanielShyr
	料號: PART NO.	圖號: DRW NO.	比例: scale:	3 : 2	版本: version:	V. 1.0	核准: aprld by:	SkyShyr			