
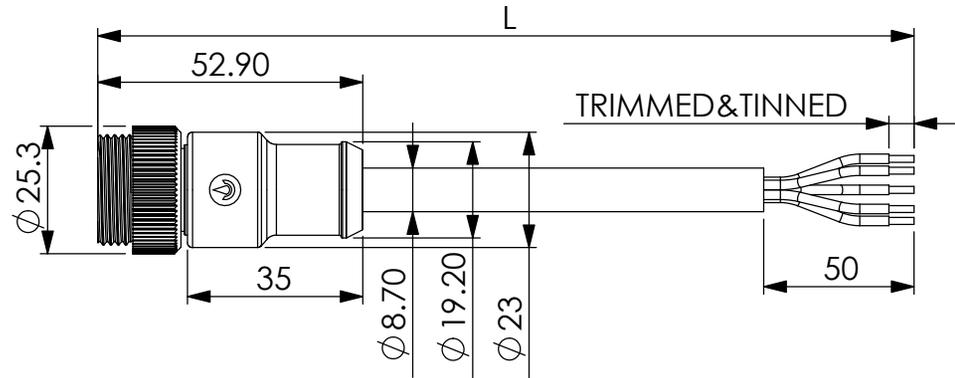


Contact assignment :

- Black _____ 1
- Blue _____ 2
- Green/Yellow _____ 3/PE
- Brown _____ 4
- White _____ 5



TECHNICAL SPECIFICATION :

Connector locking system : screw 7/8"-16UN
Termination : solder
Wire gauge : AWG 16
Cable outlet : 8.7mm
Degree of protection : IP68
Mechanical operation : > 100 mating cycles
Upper temperature : +80°C
lower temperature : - 25°C
Rated voltage : 300V
Rated current(40°C) : 9A
Contact resistance : ≤3mΩ

MATERIALS :

Contact : Brass
Contact plating : Nickel 50μ / Gold 10μ
Housing : PBT + 30% GF.
Coupling nut : Brass , Nickel plated
Moulding body : PU




Part No.	Description	Length:L	Cable
CWP2205PMR-02	-	2M	PU , Black 5 x AWG 16



俞昌有限公司
YEU TSANG CO. LTD.

品名: WATER PROOF CABLE ASS'Y
 ITEM: M22 5P PLUG PU CABLE
 料號: PART NO.
 圖號: DRW NO.



一般公差
 .X +/-0.25
 .XX +/-0.10

SHEET:
 1
 1

單位: mm
 unit: mm
 比例: 3 : 2
 scale: 3 : 2

日期: '08/01/23
 date: '08/01/23
 版本: V. 1.0
 version: V. 1.0

繪圖: DanielShyr
 drwn by: DanielShyr
 核准: SkyShyr
 aprvld by: SkyShyr