
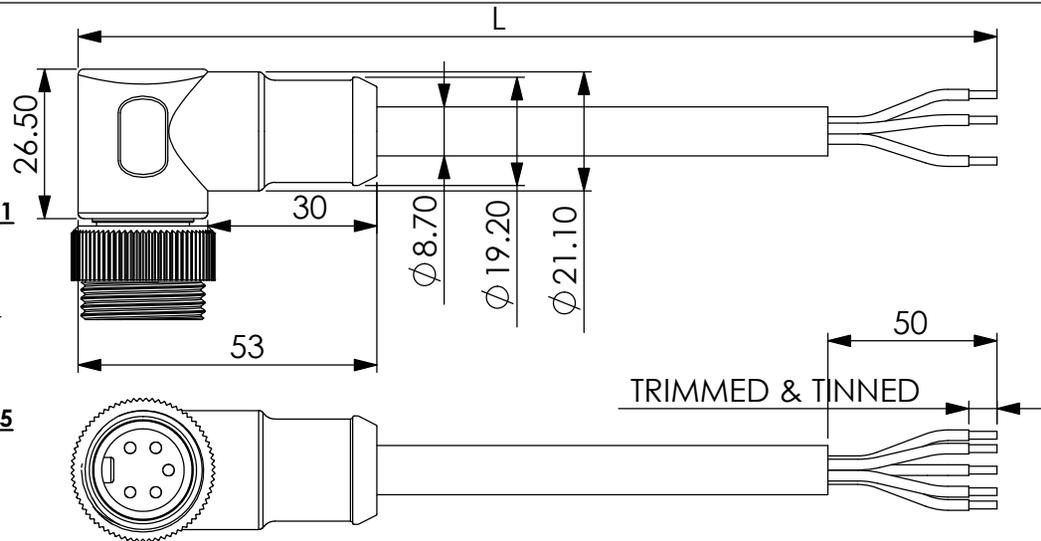


Contact assignment :

- Black _____ 1
- Blue _____ 2
- Green/Yellow _____ 3/PE
- Brown _____ 4
- White _____ 5



TECHNICAL SPECIFICATION :

- Connector locking system : screw 7/8"-16UN
- Termination : solder
- Wire gauge : AWG 16
- Cable outlet : 8.7mm
- Degree of protection : IP68
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 25°C
- Rated voltage : 300V
- Rated current(40°C) : 9A
- Contact resistance : ≤3mΩ

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU




Part No.	Description	Length:L	Cable
CWP2205PMR-RA02	-	2M	PU , Black 5 x AWG16



俞昌有限公司
YEU TSANG CO. LTD.

品名: ITEM :	WATER PROOF CABLE ASS'Y M22 5P R/A PLUG PU CABLE		
料號: PART NO.	圖號: DRW NO.		



一般公差
.X +/-0.25
.XX +/-0.10

SHEET:	1
1	1

單位:
unit: mm
比例:
scale: 3 : 2

日期:
date: '08/01/23
版本:
version: V. 1.0

繪圖:
drwn by: DanielShyr
核准:
aprld by: SkyShyr