
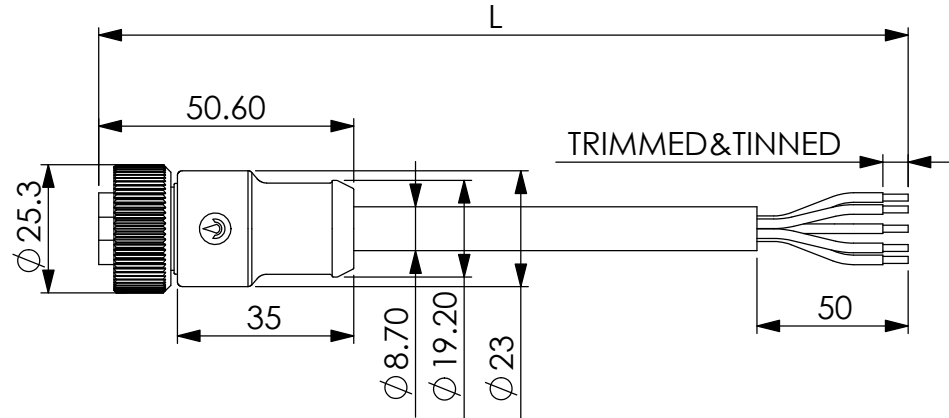


Contact assignment :

- Black _____ 1
- Blue _____ 2
- Green/Yellow _____ 3/PE
- Brown _____ 4
- White _____ 5



TECHNICAL SPECIFICATION :

- Connector locking system : screw 7/8"-16UN
- Termination : solder
- Wire gauge : AWG 16
- Cable outlet : 8.7mm
- Degree of protection : IP68
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 25°C
- Rated voltage : 300V
- Rated current(40°C) : 9A
- Contact resistance : $\leq 3m\Omega$

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50 μ / Gold 10 μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU




Part No.	Description	Length:L	Cable
CWP2205JMR-02	-	2M	PU , Black 5 x AWG 16



俞昌有限公司
YEU TSANG CO. LTD.

品名: WATER PROOF CABLE ASS'Y
ITEM : M22 5P JACK PU CABLE

料號: PART NO.
圖號: DRW NO.



一般公差
.X +/-0.25
.XX +/-0.10

SHEET:
1
1

單位: mm
unit: mm
比例: 3:2
scale:

日期: '08/01/23
date:
版本: V. 1.0
version:

繪圖: DanielShyr
drwn by:
核准: SkyShyr
aprld by: