
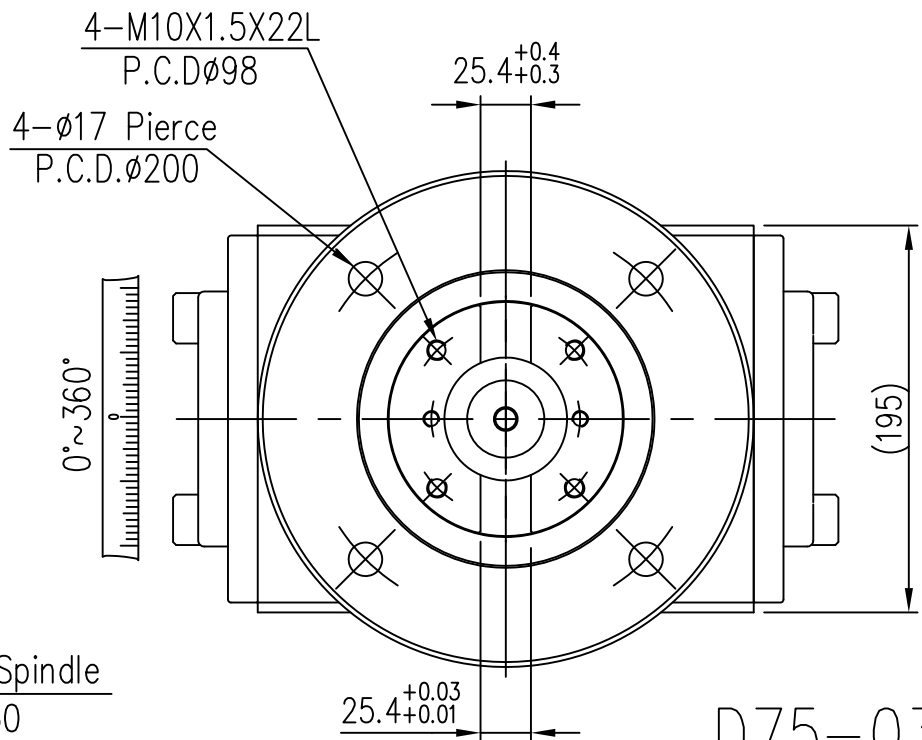


加工精度

Accessories : T-Screw
M16XP2.0X67L X4

Max Cutter Dia	ø150(6")
Reduction Ratio	1 : 1
Max Torque	750N.m
Max Power	25kw
Max Revolving	800rpm
Main Spindle Steering	Right Turn
Pull Stud Select	BT(M24X3.0)
	NT(M24X3.0)
	NT(1")


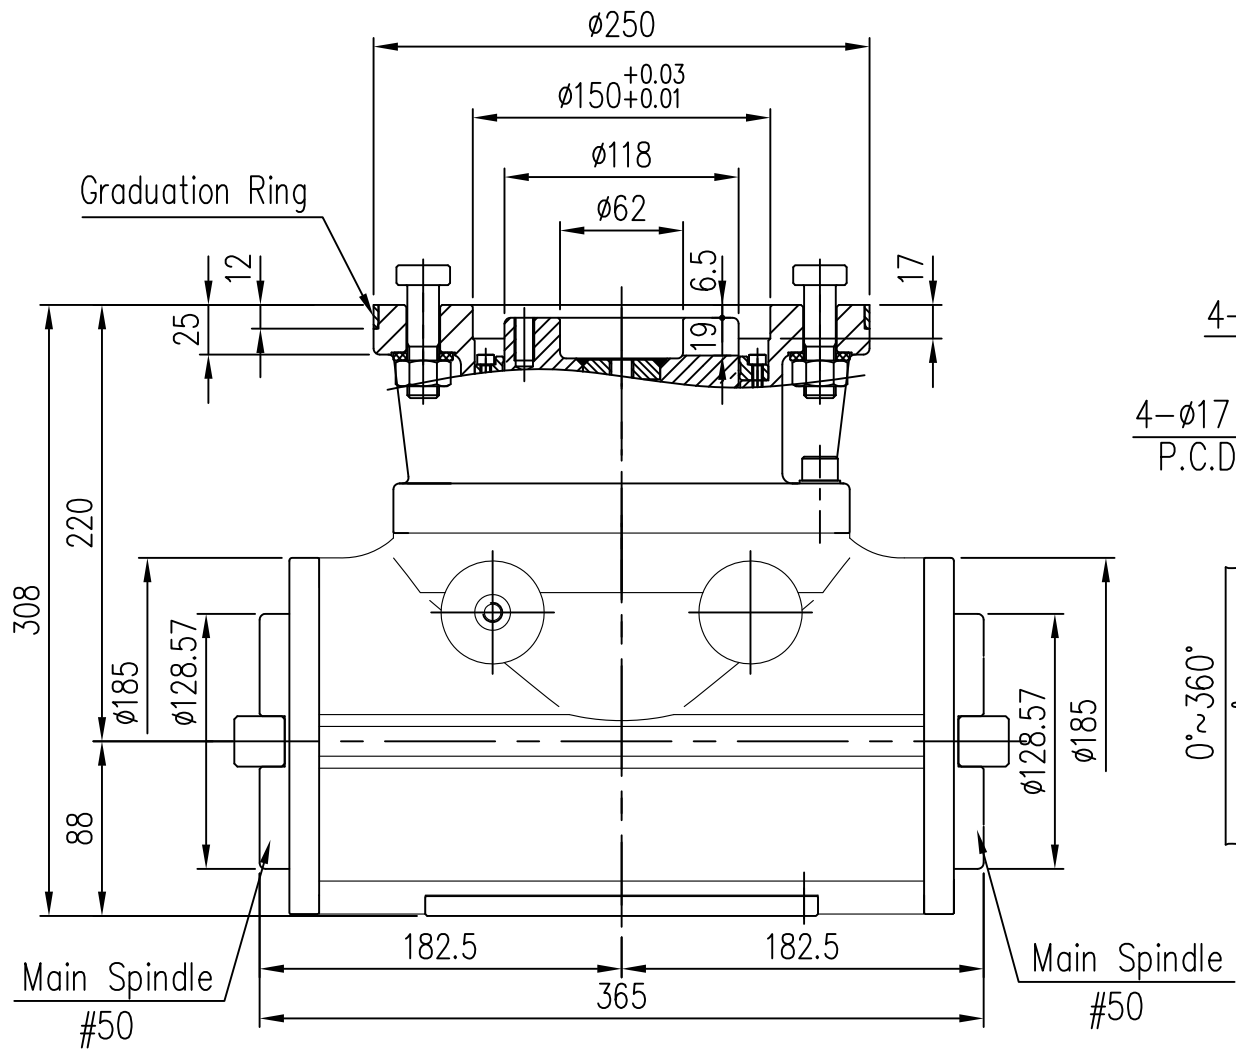


D75-03(E)

--

Accessories : T-Screw M16XP2.0X67L X4
--

Max Cutter Dia	ø150(6")
Reduction Ratio	1 : 1
Max Torque	750N.m
Max Power	25kw
Max Revolving	800rpm
Main Spindle Steering	Right Turn
Pull Stud Select	BT(M24X3.0)
	NT(M24X3.0)
	NT(1")

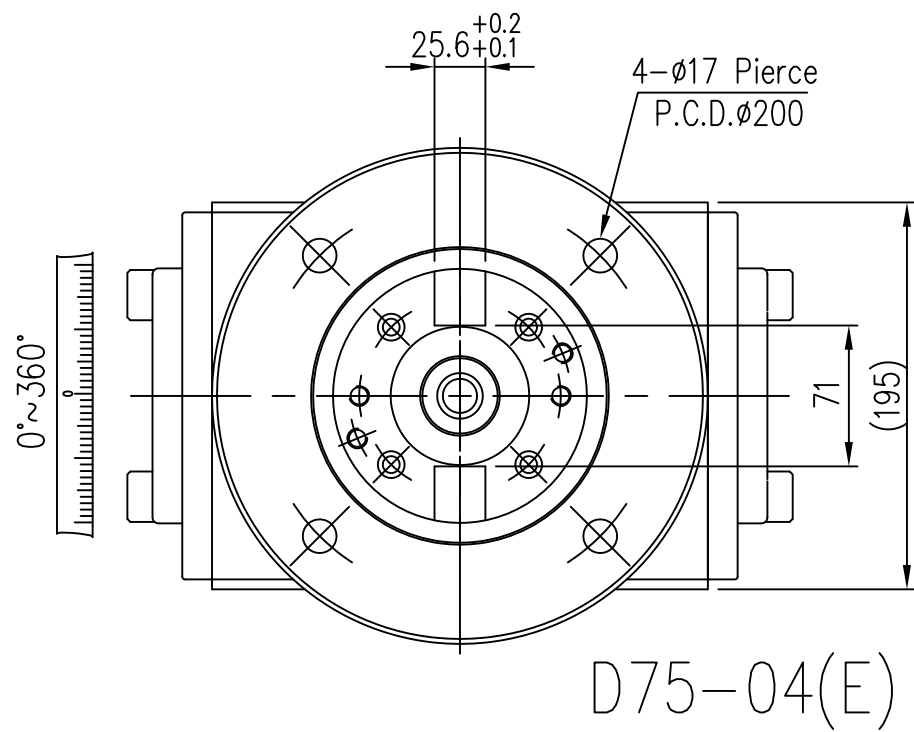
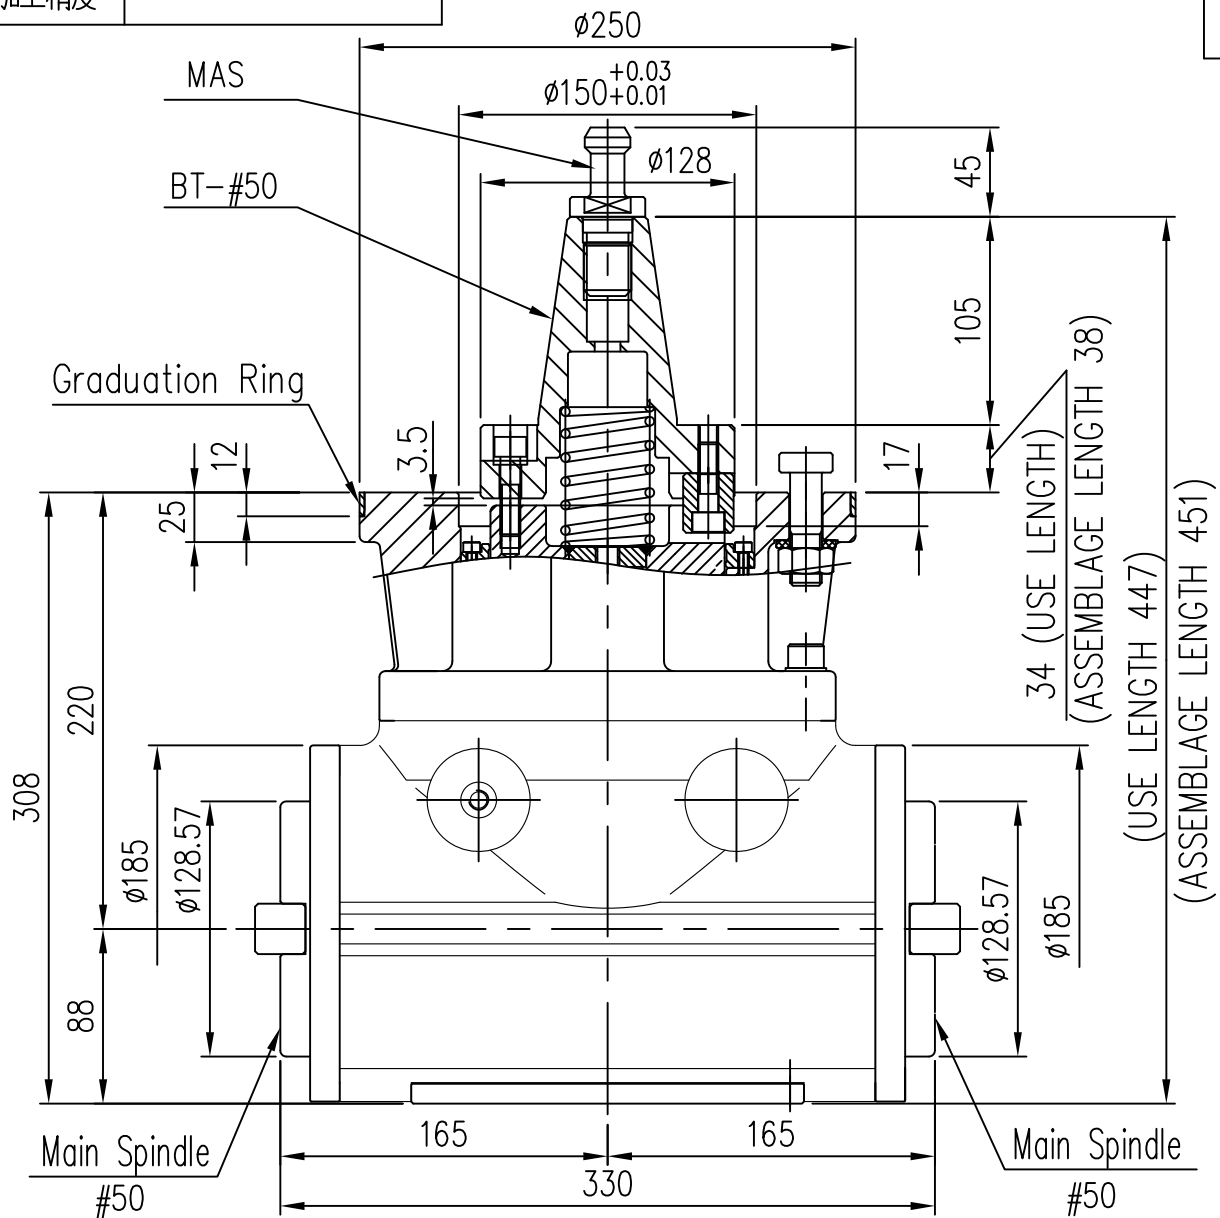


加工精度

Accessories : T-Screw
M16XP2.0X67L X4


Max Cutter Dia	ø150(6")
Reduction Ratio	1 : 1
Max Power	25kw
Max Torque	600N.m
Max Revolving	1200rpm
Main Spindle Steering	Right Turn

Pull Stud Select	BT(M24X3.0)
	NT(M24X3.0)
	NT(1")

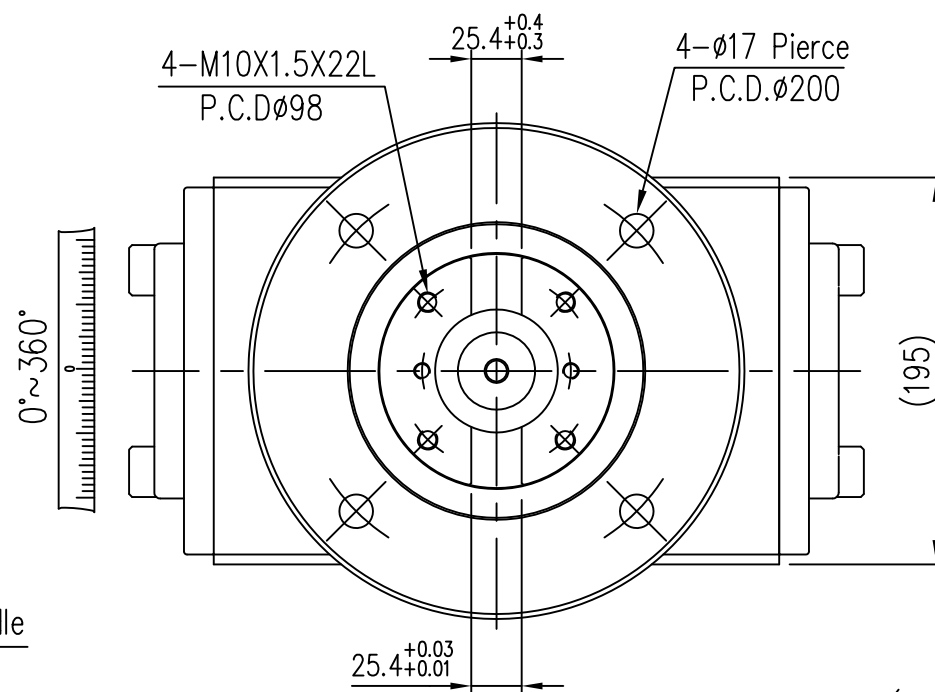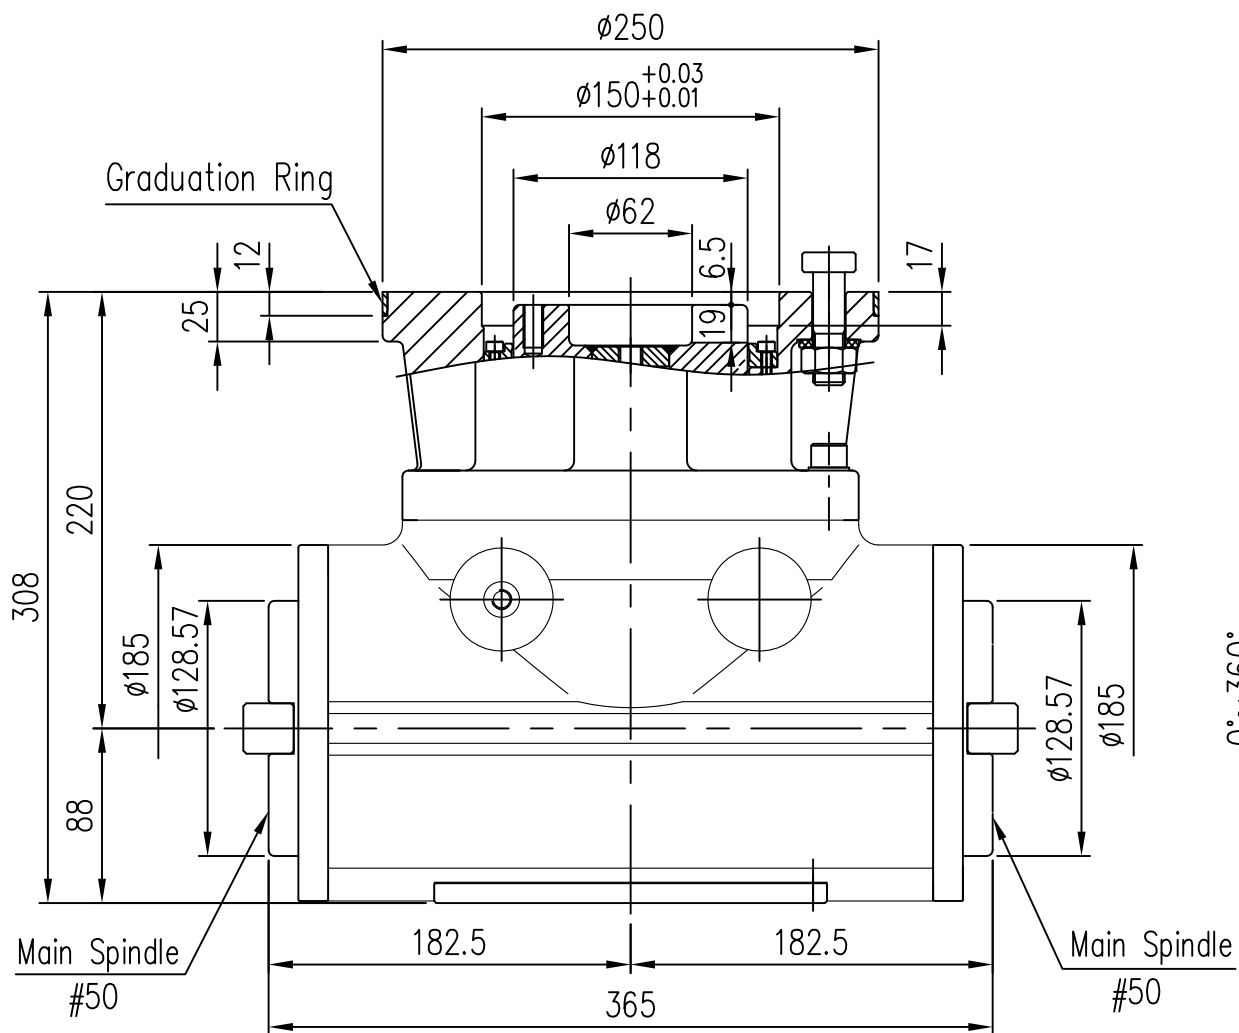

D75N-01(E)

加工精度	
------	--



Pull Stud Select	BT(M24X3.0)
	NT(M24X3.0)
	NT(1")

