


加工精度	
------	--

拉刀螺栓	MAS
	CAT
	DIN

減速比	1 : 1
最大扭距	30N.m
最高轉速	3000rpm
主軸轉向	正轉
潤滑油種類	油脂潤滑

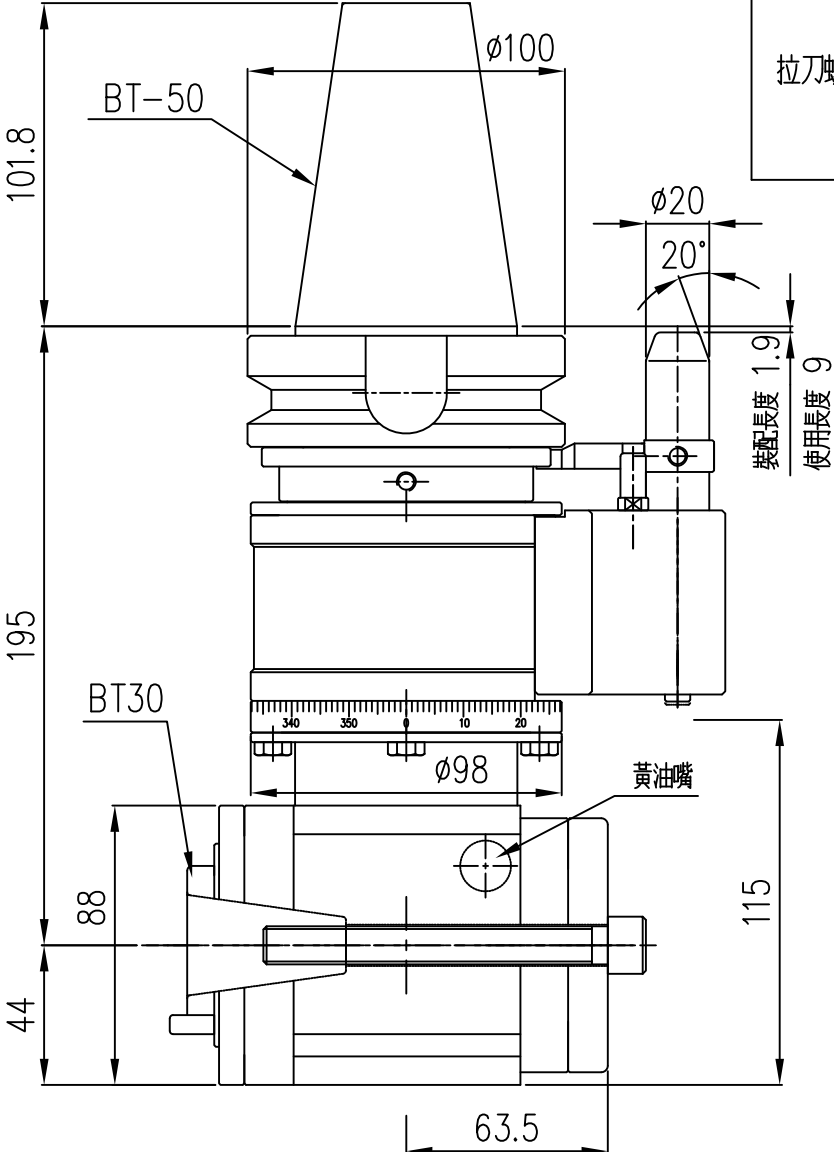

Technical drawing of a lathe tool holder assembly, showing three views: front, top, and side.

Front View Dimensions:

- Overall height: 101.8
- Overall length: 195
- Tool holder diameter: $\phi 100$
- Tool holder type: BT-50
- Tool holder length: 1.9
- Tool holder angle: 20°
- Tool holder diameter: $\phi 20$
- Tool holder length: 9
- Tool holder diameter: $\phi 98$
- Tool holder length: 115
- Tool holder diameter: $\phi 98$
- Tool holder length: 115
- Tool holder diameter: $\phi 98$
- Tool holder length: 115

Top View Dimensions:

- Overall width: 88
- Overall height: 71
- Overall length: 85.5
- Overall width: 15
- Overall length: 25.6 $^{+0.2}_{+0.1}$

Side View Dimensions:

- Overall height: 115
- Overall width: 63.5
- Tool holder diameter: $\phi 98$
- Tool holder length: 115
- Tool holder diameter: $\phi 98$
- Tool holder length: 115
- Tool holder diameter: $\phi 98$
- Tool holder length: 115

Table 1: Specifications

Item	Specification
拉刀螺栓	MAS
拉刀螺栓	CAT
拉刀螺栓	DIN
減速比	1 : 1
最大扭距	30N.m
最高轉速	3000rpm
主軸轉向	正轉
潤滑油種類	油脂潤滑

Table 2: Dimensions

Item	Dimension
Overall height	101.8
Overall length	195
Tool holder diameter	$\phi 100$
Tool holder length	1.9
Tool holder angle	20°
Tool holder diameter	$\phi 20$
Tool holder length	9
Tool holder diameter	$\phi 98$
Tool holder length	115
Tool holder diameter	$\phi 98$
Tool holder length	115
Tool holder diameter	$\phi 98$
Tool holder length	115

Table 3: Tolerances

Item	Tolerance
Overall length	$25.6^{+0.2}_{+0.1}$

