




|                                              |              |  |
|----------------------------------------------|--------------|--|
| 加工精度                                         |              |  |
| Max Cutter Dia                               | φ100(4")     |  |
| Reduction Ratio                              | 1 : 1        |  |
| Max Torque                                   | 300N.m       |  |
| Max Power                                    | 15kw         |  |
| Max Revolving                                | 2000rpm      |  |
| Main Spindle Steering                        | Right Turn   |  |
| Pull Rod<br>Select                           | BT(M16XP2.0) |  |
|                                              | NT(M16XP2.0) |  |
|                                              | NT(5/8")     |  |
| Accessories : "T"-Screw X 4<br>M12XP1.75X71L |              |  |

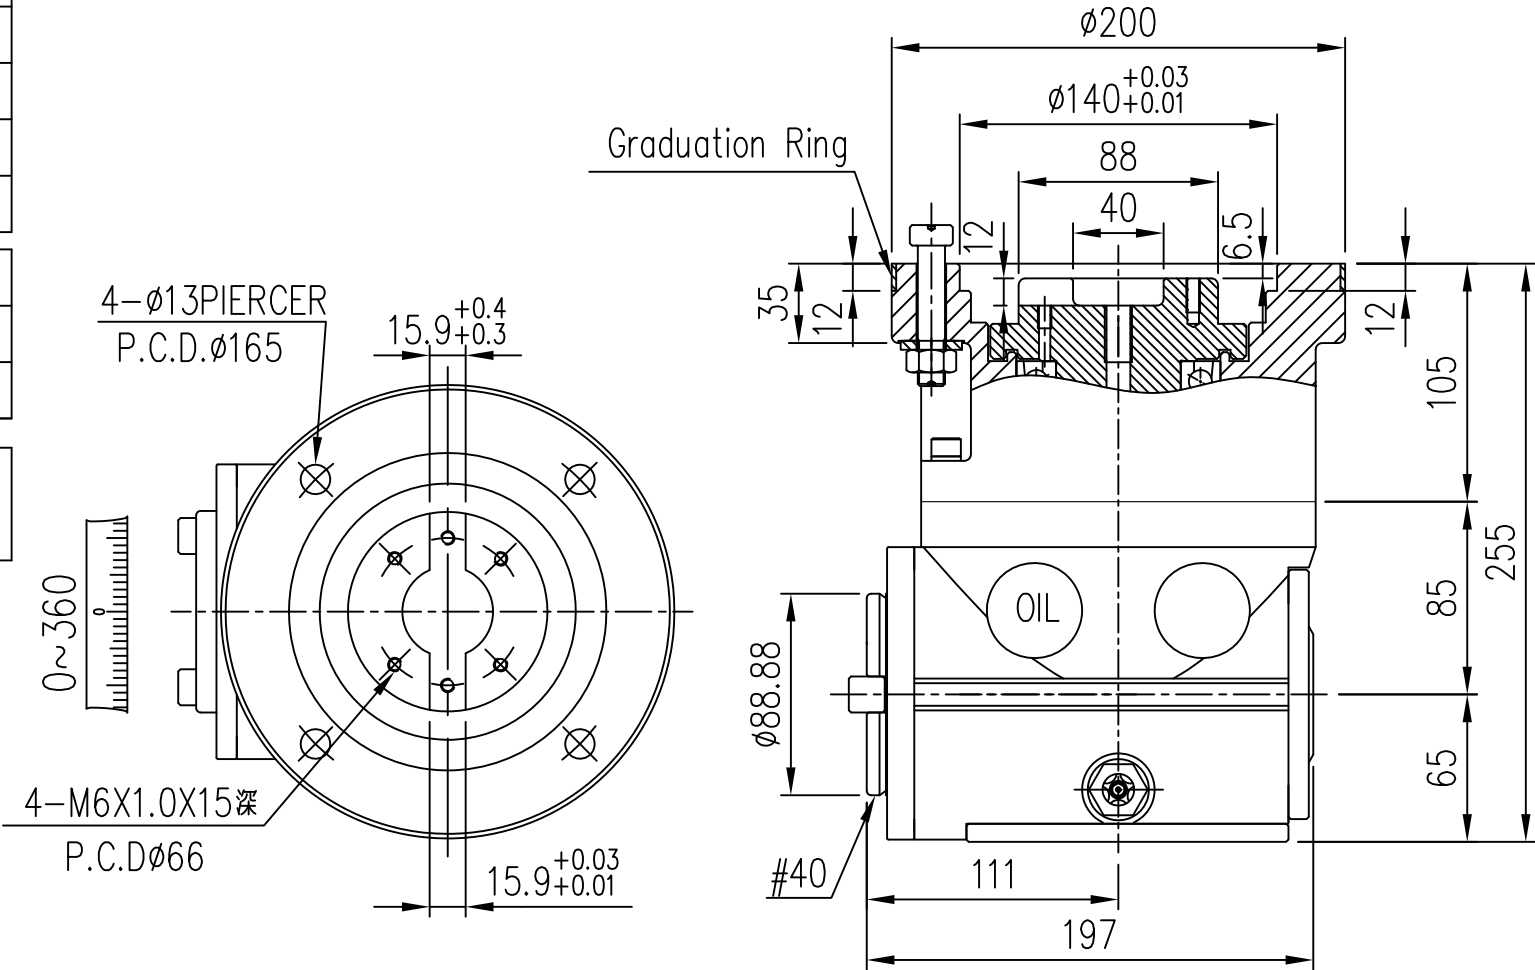


CN74-01(E)

|                                             |            |              |
|---------------------------------------------|------------|--------------|
| 加工精度                                        |            |              |
| Max Cutter Dia                              | ø100(4")   |              |
| Reduction Ratio                             | 1 : 1      |              |
| Max Torque                                  | 300N.m     |              |
| Max Power                                   | 15kw       |              |
| Max Revolving                               | 2000rpm    |              |
| Main Spindle Steering                       | Right Turn |              |
| Pull Rod<br>Select                          |            | BT(M16XP2.0) |
|                                             |            | NT(M16XP2.0) |
|                                             |            | NT(5/8")     |
| Accessories: "T"-Screw X 4<br>M12XP1.75X71L |            |              |

CN74-02(E)

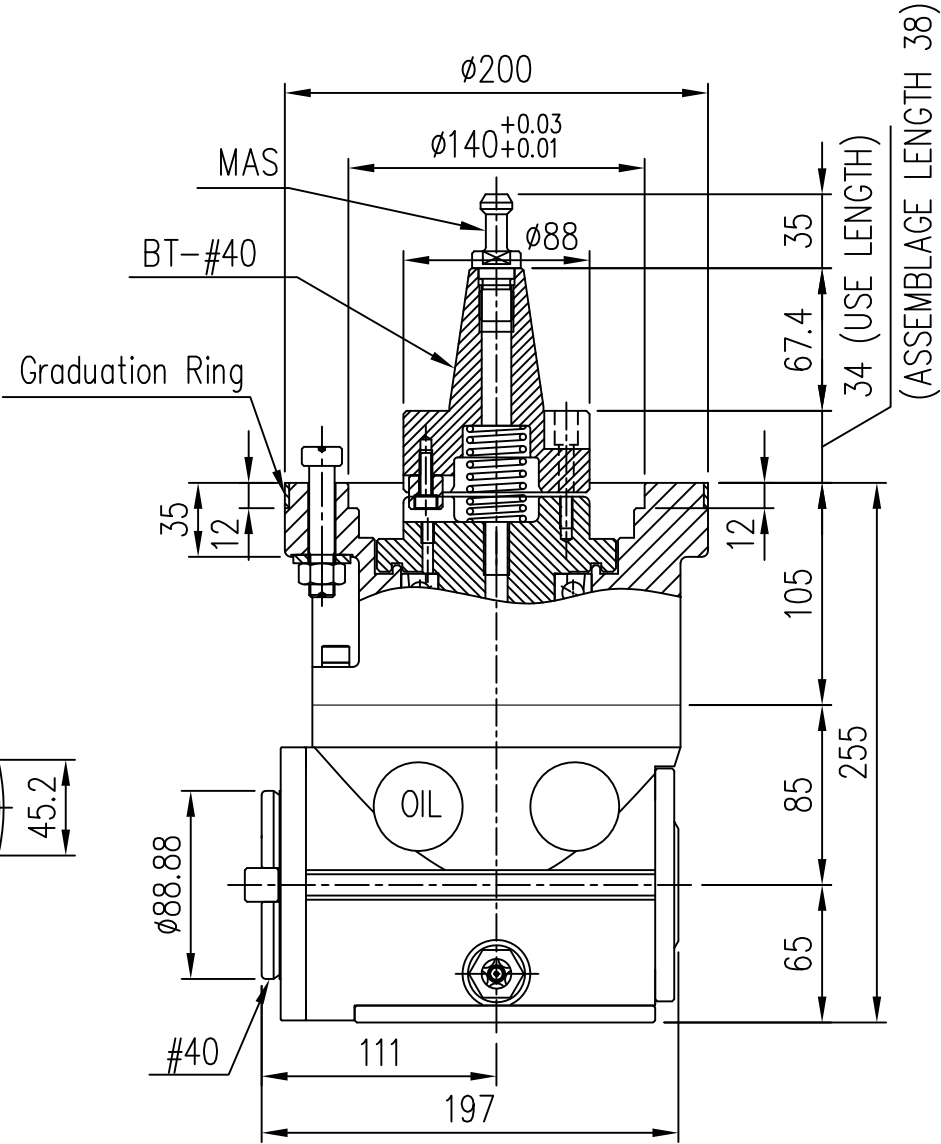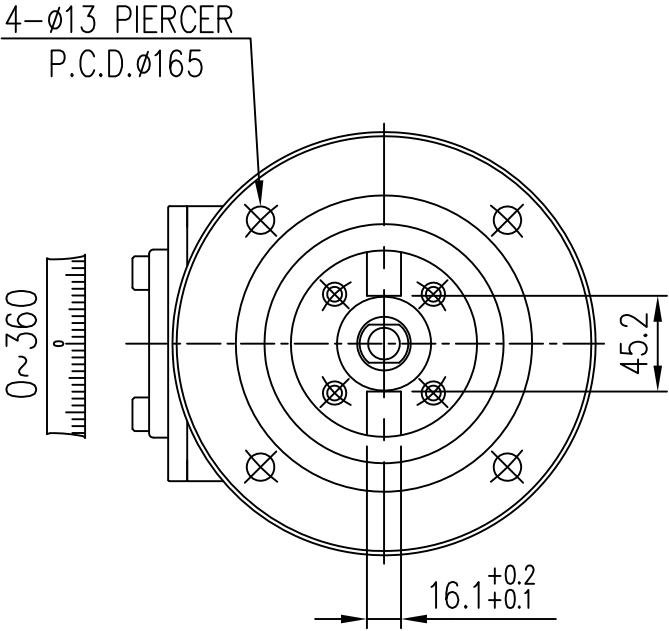

|                                           |              |
|-------------------------------------------|--------------|
| 加工精度                                      |              |
| Max Cutter Dia                            | φ100(4")     |
| Reduction Ration                          | 1 : 1        |
| Max Torque                                | 300N.m       |
| Max Power                                 | 15kw         |
| Max Revolving                             | 2000rpm      |
| Main Spindle Steering                     | Right Turn   |
| Pull Stud Select                          | BT(M16XP2.0) |
|                                           | NT(M16XP2.0) |
|                                           | NT(5/8")     |
| Accessories : T-Screw X4<br>M12XP1.75X71L |              |

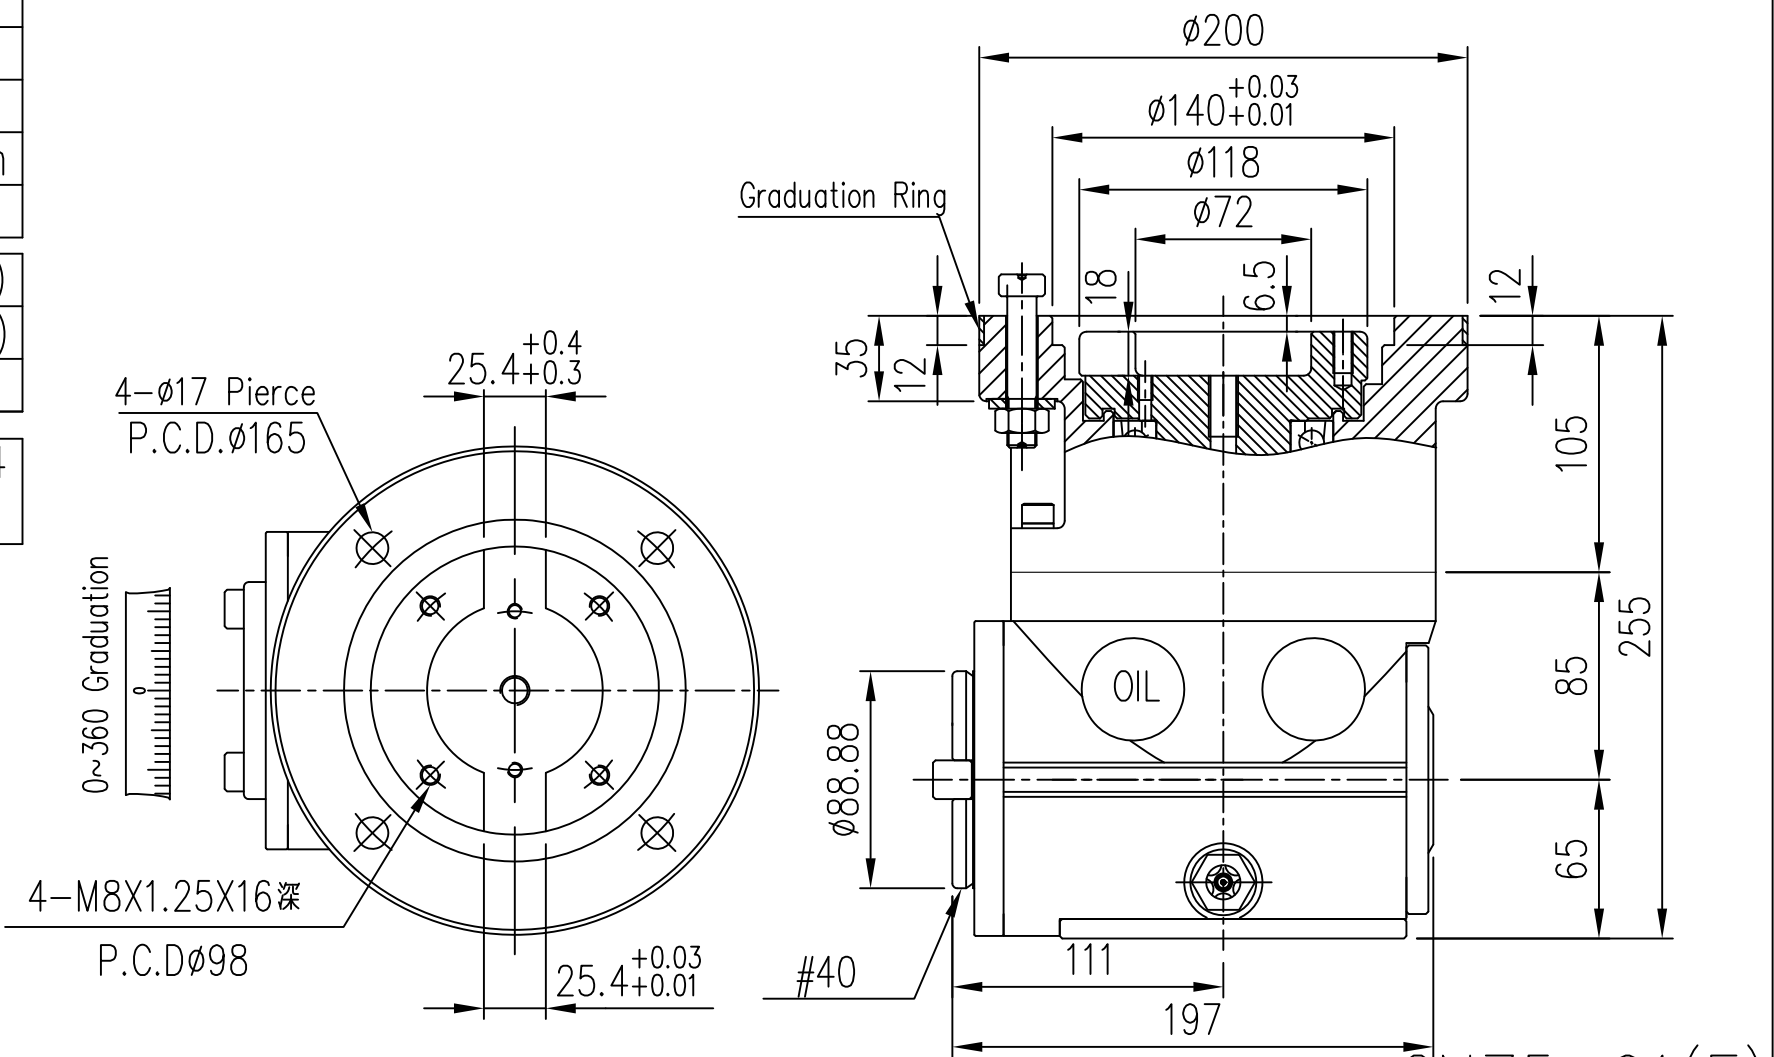

CN75-01(E)

|                                              |              |  |
|----------------------------------------------|--------------|--|
| 加工精度                                         |              |  |
| Max Cutter Dia                               | φ100(4")     |  |
| Reduction Ratio                              | 1 : 1        |  |
| Max Torque                                   | 300N.m       |  |
| Max Power                                    | 15kw         |  |
| Max Revolving                                | 2000rpm      |  |
| Main Spindle Steering                        | Right Turn   |  |
| Pull Rod Select                              | BT(M16XP2.0) |  |
|                                              | NT(M16XP2.0) |  |
|                                              | NT(5/8")     |  |
| Accessories : "T"-Screw X 4<br>M12XP1.75X71L |              |  |

