

Lithe 55 CP Surface Pendant

Design Features:

Mechanical

- Sleek and architectural appearance
- Interchangeable optics
- Built in LED Driver
- Comfort cut-off to reduce glare

LED/Optics


- LM80 rated Philips Luxeon M LED Array.
- Less than 9.6 watt Power consumption
- Input Voltage: see the ordering code information
- Lumen output: ≈ 600 (lm) delivered lumen
- CBCP : Spot 3233 cd/ Medium 868cd/ Wide 1082cd
- Color Temp.: Warm White 2700K, 3000K, 3500K & 4000K optional
- CRI: > 80 (90 CRI optional)
- Optics : Spot 12 deg. / Medium 22 deg. / Wide 42 deg. options
- Life span: 50,000 hrs based on 70% lumen maintenance
- No harmful ultra violet light, infrared wavelengths
- Warranty: 5 years

Electrical

- Remote Class 2 driver, Power Factor > 0.90.
- TRIAC or 0-10V dimmable (optional)
- Overload & short circuit protection.

Approval / Certificate

- Dry and Damp Locations.
- RoHs compliant.
- IP44

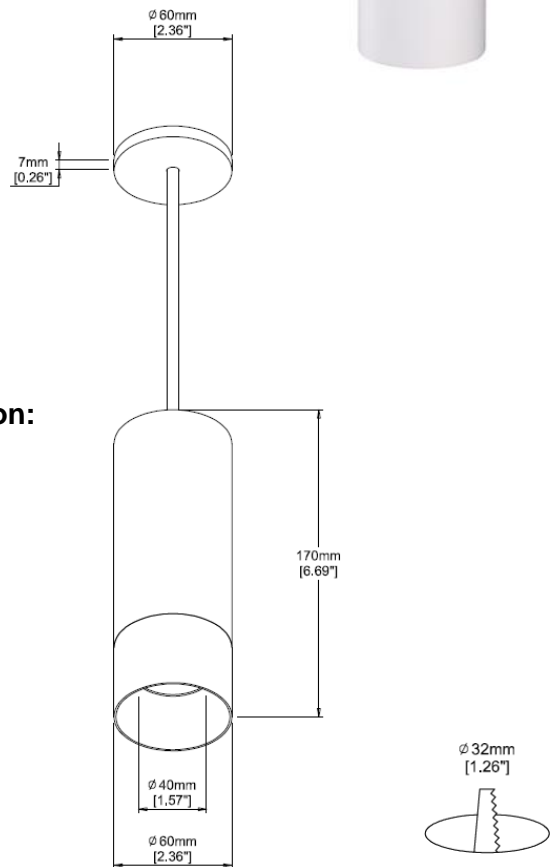

Dimension:

Ordering Code Information:

| PRODUCT | LUMEN | COLOR TEMPERATURE | FINISH | BEAM ANGLE | Input Voltage |
|---|-----------|--|--|--|---|
| LTE55CP | 06 | 27 | BKGD | S | 1 |
| LTE55CY LTHE55 Colour Surface Pendent | 06 600lm | 27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K) | WHB White Body Black Trim BKGD Black Body Gold Trim | S (Spot)/12 deg. M (Medium)/22 deg. W (Wide)/42 deg. | 1 120V/TRIAC&ELV 4 220-240/TRIAC&ELV |



Macron Associate Co.
ISO9001:2008



41146 #352, Perng-Yi Road, Taiping, Taichung, Taiwan R.O.C.

TEL : +886-4-22708357 FAX : +886-4-22774516

www.macrongroup.com

Copyright © Macron. All technical information in this document is subject to change.

VER.1