

# LED Scene Lighting


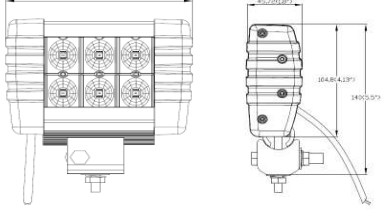

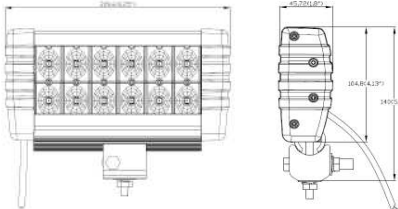

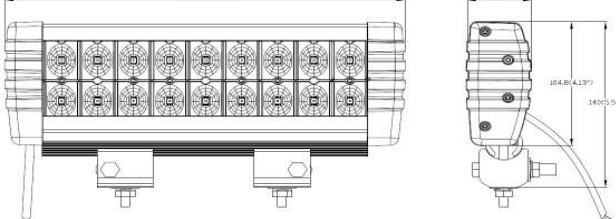
## Features

- ◇ 9V~36V DC operation; low operation voltage: 9V DC.
- ◇ Color temperature: 5000~6300K.
- ◇ Constant current design.
- ◇ It can be turned up / down each 15 degrees angle(total 30 degrees) and shifted to left / right as well.(see Remark 1)
- ◇ Design of IP67 standard.




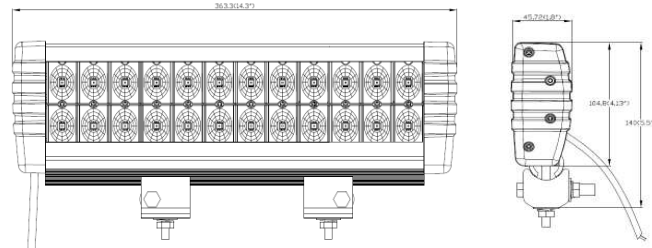

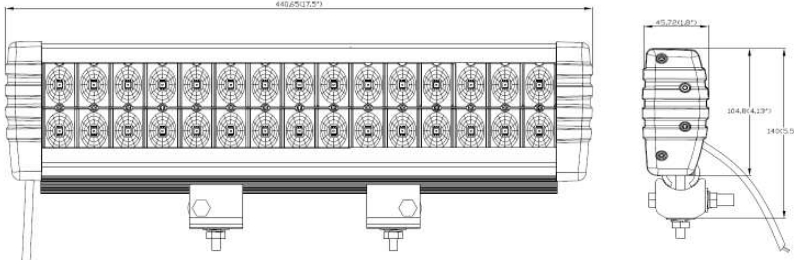

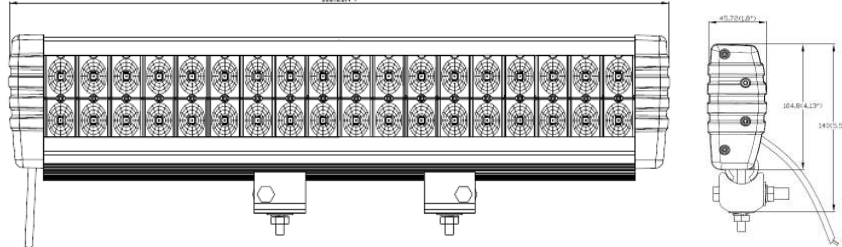
P/N	Length (inch)	LED (pcs)	Max current (A)	Power Dissipation (W)	Luminous intensity (cd)	Luminous Flux (lm)	Illuminance (1M)(lux)	Weight (g)
LE111W-1	5.2	6	0.6	7	1,020	415	990	545
LE111W-2	8.25	12	1.2	15	1,900	960	1810	850
LE111W-3	11.25	18	1.8	21.6	2,570	1,320	2220	1,280
LE111W-4	14.3	24	2.4	28.8	3,590	1,870	3060	1,600
LE111W-5	17.5	30	3.0	36	3,690	2,240	3520	1,900
LE111W-6	25.4	36	4.2	50.4	4,280	2,600	3950	2,200

## Drawing Dimension mm (inch)

LE111W-1	L x W x H: 132.2x45.72x104.8 (140) / 5.2x1.8x4.13 (5.5)
	
LE111W-2	L x W x H: 209.6x45.72x104.8 (140) / 8.25x1.8x4.13 (5.5)
	
LE111W-3	L x W x H: 285.74x45.72x104.8 (140) / 11.25x1.8x4.13 (5.5)
	








**KEEPER TECHNOLOGY CO., LTD.**

5F. No.8, Wugong 5th Rd., Wugu Industrial Park,  
 Xinzhuang Dist., New Taipei City 24890, Taiwan  
 Tel: +886-2-22997233 Fax: +886-2-22997234  
<http://www.keepertech.com.tw>

<p>LE111W-4</p> 	<p>L x W x H: 363.3x45.72x104.8 (140) / 14.3x1.8x4.13 (5.5)</p> 
<p>LE111W-5</p> 	<p>L x W x H: 440.65x45.72x104.8 (140) / 17.5x1.8x4.13 (5.5)</p> 
<p>LE111W-6</p> 	<p>L x W x H: 518x45.72x104.8 (140) / 25.4x1.8x4.13 (5.5)</p> 

**Remark**

1. The construction of the angle adjusting and position shifting.

Drawing	Normal	Up 15°	Down 15°	Center	Left	Right
						

2. The standard package:

P/N	LED(pcs)	Weight(kg/pcs)	pcs/ctn	Weight(kg/ctn)	ctn size (mm)	MOQ (pcs)
LE111W-1	6	0.46	20	10	365*310*272	100
LE111W-2	12	0.76	10	8	365*310*272	100
LE111W-3	18	1.2	10	12	365*310*272	100
LE111W-4	24	1.4	5	7	635*310*272	100
LE111W-5	30	1.7	5	9	635*310*272	100
LE111W-6	36	2.1	5	11	635*310*272	100