

The installation instruction of W212 Daytime running light:

The following parts are included in the kit of W212 daytime running light:




(1) Daytime running light



(2) Daylight net support



(3) Chrome molding

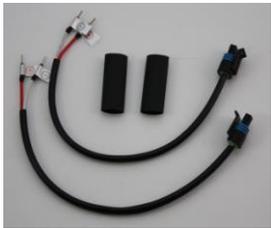

(4) Cable A



(5) Cable B



(6) Cable C



(7) Cable D




(8) MidWay connector

1. For W212 2009-2010 the car has only one fog lamp (Please refer below car picture 1)



Picture 1

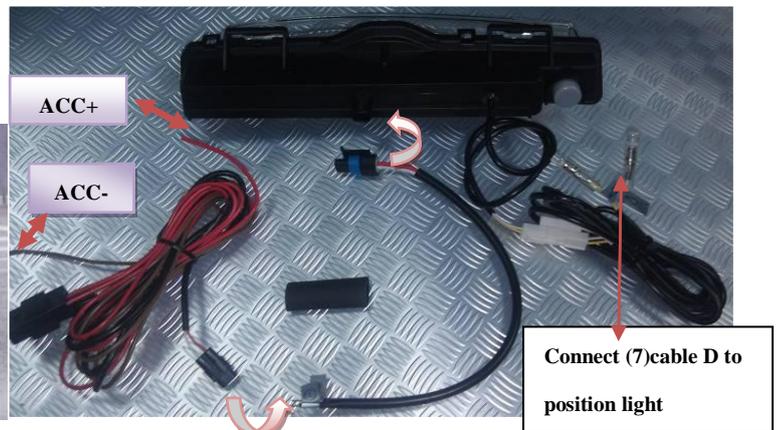

Picture 2

- To remove the fog lamp with net support from the bumper.
 - To assemble (1) Daytime running light and (2) Daylight net support together then install back onto the bumper.
 - To cover the (3) Chrome molding onto (1) Daytime running light.
- To connect electric power and light control system (picture 2)
- Use (4) Cable A and (6) Cable C to connect (1) Daytime running light then use (6) Cable to connect the ACC. for power.
 - Two functions for DRL light control system: While the head light is off, the DRL should be 100% lighted on. And while the head light is lighted on, you have two choices for the DRL 100% lighted on or 50% lighted on. If you decide the DRL will be 100% lighted on, you have to use (7) Cable D to connect the wire labeled 100% lighted bulb sign of (5) Cable B and if you want the DRL 50% lighted on, you have to use (7) Cable D to connect the wire labeled 50% lighted bulb sign of (5) Cable B then to connect (7) Cable D to the position light.