

The installation instruction of W212 Daytime running light:

The following parts are included in the kit of W212 daytime running light:




(1) Daytime running light



(2) Daylight net support



(3) Chrome molding



(4) Cable A



(5) Cable B



(6) Cable C



(7) Cable D



(8) MidWay connector

1. For W212 2011-2013 the car has DRL to improve the color to 6000K and 50% light to 100% light on.

(Please refer below car picture 5)




Picture 5

Original DRL Socket



Picture 6

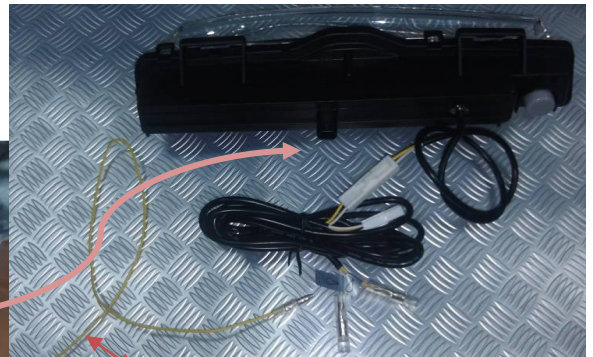

Picture 7

Connect (7)Cable D to position light

- To remove the DRL lamp with net support from the bumper.
- To assemble (1)Daytime running light and (2)Daylight net support together then install back onto the bumper.
- To cover the (3)Chrome molding onto (1)Daytime running light.

To connect electric power and two choices of light control system (picture 6,7)

- First choice:** To keep same as the original DRL system 100% lighted on and 50% lighted on function. And connect the wires all same as the original position. The DRL light color will be improved to 6000K.
- Second choice:** Use the original ACC cable (picture 6) to connect the ACC. for power.

Two functions for DRL light control system: While the head light is off, the DRL should be 100% lighted on. And while the head light or position light is lighted on, the original DRL 100% lighted off or 50% lighted on. To use (7)Cable D to connect the wire labeled 100% lighted bulb sign of (5)Cable B to improve the original DRL 100% lighted off or 50% lighted on to DRL 100% lighted on.