



NXT-250R

NXT - 250 H - 1

最小分割角度 Min. index degree

1° or 5°

R 馬達右側水平放置

RV 馬達右側垂直放置


H 臥式機 Horizontal

盤面尺寸 Table diameter


CNC 油壓齒式分割盤

CNC hydraulic gear indexer

型式 Model		NXT-250H		NXT-380H		NXT-500H	
盤面尺寸 Table diameter (L x W)	mm	Ø 250		Ø 380		500 x 500	
盤面主軸中心孔 Diameter of pallet center hole	mm	Ø 55 H7		Ø 60 H7		Ø 50 H7	
機台總高 Overall height of table	mm	200		240		280	
盤面 T 型槽寬度 Width of pallet T-slot	mm	12		14 H7		18 H7	
基準導槽寬 Width of Guide block	mm	18		x		18 H7	
鎖緊裝置 (油壓) Clamping device (Hydraulic)	kg/cm ²	35		35		35	
最小分割角度 Min. indexing degree	degree	5°	1°	5°	1°	5°	1°
等分割數 Table division		72	360	72	360	72	360
分割精度 (累積值) Indexing accuracy(accumulative)	arc sec	4"		4"		4"	
重現精度 Repeatability	arc sec	±1"		±1"		±1"	
最高轉速 Max. rotation speed	轉盤 Table	rpm		rpm		rpm	
	馬達 Motor	rpm		rpm		rpm	
伺服馬達 (選配) Servo motor (optional)	發那科 FANUC	α8i		α8i		α12i	
	三菱 MITSUBISHI	HF-104/154		HF-154		HF-204	
	西門子 SIEMENS	1FK7063		1FK7063		1FK6083	
總齒數比 Gear ratio		1/120		1/120		1/120	
旋轉扭力 Rotation torque		48		48		200	
鎖緊扭力 Clamping torque	F  kg	1500		2000		2500	
	FxR  kg-m	300		400		500	
容許積載荷重 Load Capacity	0°  kg	300		350		1200	
淨重 Net weight	kg	198		210		300	

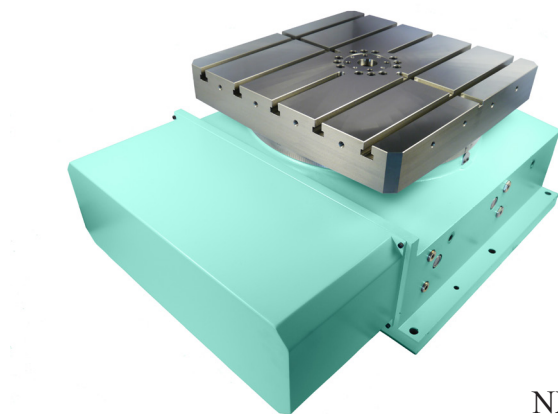

NXT-500H

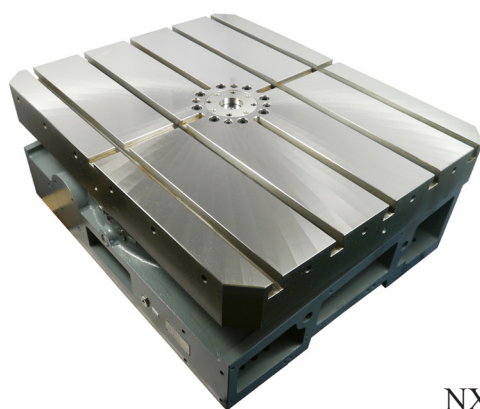

NXT-800H

型式 Model		NXT-630H		NXT-800H		NXT-1000H	
盤面尺寸 Table diameter (L x W)	mm	630 x 630		800 x 800		1000 x 1000	
盤面主軸中心孔 Diameter of Pallet center hole	mm	Ø 50 H7		Ø 60 H7		Ø 60 H7	
機台總高 Overall height of table	mm	320		380		410	
盤面 T 型槽寬度 Width of pallet T-slot	mm	20 H7		22 H7		22 H7	
基準導槽寬 Width of Guide block	mm	20 H7		20 H7		20 H7	
鎖緊裝置 (油壓) Clamping device (Hydraulic)	kg/cm ²	35		35		35	
最小分割角度 Min. indexing degree	degree	5°	1°	5°	1°	5°	1°
等分割數 Table division		72	360	72	360	72	360
分割精度 (累積值) Indexing accuracy(accumulative)	arc sec	4"		4"		4"	
重現精度 Repeatability	arc sec	±1"		±1"		±1"	
最高轉速 Max. rotation speed	轉盤 Table	rpm		rpm		rpm	
	馬達 Motor	rpm		rpm		rpm	
伺服馬達 (選配) Servo motor (optional)	發那科 FANUC	α12i		α22i		α22i	
	三菱 MITSUBISHI	HF-204S		HF-354S		HF-354S	
	西門子 SIEMENS	1FK6083		1FK6101		1FK6101	
總齒數比 Gear ratio		1/180		1/180		1/240	
旋轉扭力 Rotation torque		280		430		450	
鎖緊扭力 Clamping torque	F  kg	4000		6000		8000	
	FxR  kg-m	600		800		12000	
容許積載荷重 Load Capacity	0°  kg	2500		4000		8000	
淨重 Net weight		kg		550		1000	
						1970	