



電腦數控分度盤 CNC Rotary Table

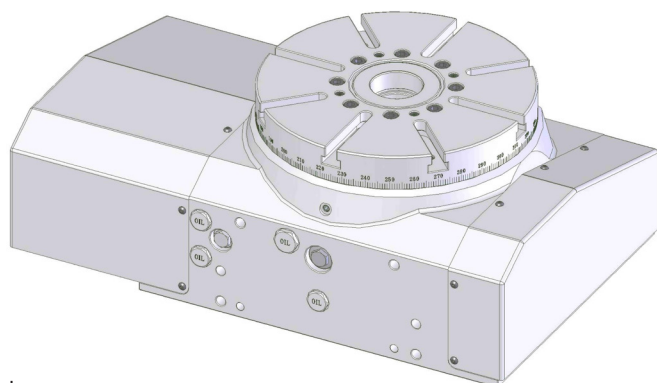


NRT-320H

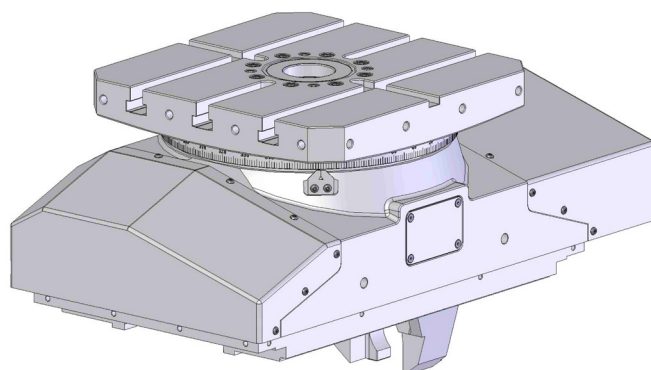


NRT-380H

型式 Model			NRT-320H	NRT-380H	NRT-500H
工作台尺寸 Table size (L x W)		mm	Ø 320	380 x 380	500 x 500
基準中心孔 Diameter of table center hole		mm	Ø 60	Ø 60	x
總高度 Overall height		mm	235	270	320
T 型槽寬度 Width of T-slot		mm	14	18	x
鎖緊裝置 (油壓) Clamping device (Hydraulic)		kg/cm ²	35	30~50	35~50
最小分割角度 Min. indexing degree		degree	0.001°	0.001°	0.001°
分割精度 (累積值) Indexing accuracy (accumulative)		arc sec	15″	15″	15″
重現精度 Repeatability		arc sec	±2″	±2″	±2″
最高轉速	轉盤 Table	rpm	16.6	16.6	11.1
Max. rotation speed	馬達 Motor	rpm	2000	2000	2000
伺服馬達 (選配) Servo motor (optional)	發那科 FANUC		α4i	β8i	α12i
總齒數比 Gear ratio			1/120	1/120	1/180
容許切削扭力 Permissible cutting torque		kg	48	75	350
容許積載荷重 Load Capacity		kg	350	350	600
淨重 Net weight		kg	176	235	450

電腦數控分度盤 CNC Rotary Table

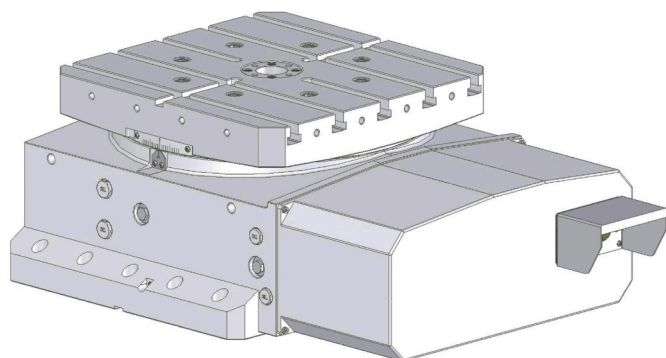

NRT-500H

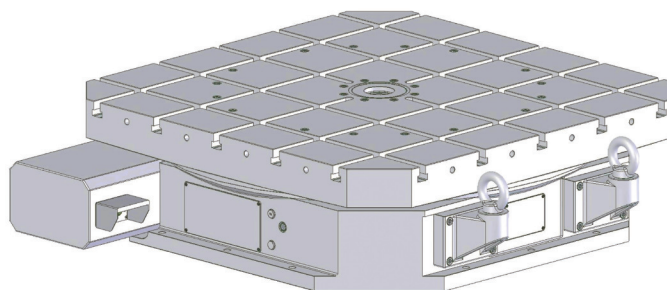

NRT-1500H

型式 Model			NRT-630H	NRT-800H	NRT-1500H
工作台尺寸 Table size (L x W)		mm	630 x 630	800 x 800	1500 x 1500
基準中心孔 Diameter of table center hole		mm	Ø 50	Ø 100	Ø 100 H7
總高度 Overall height		mm	360	400	430
T 型槽寬度 Width of T-slot		mm	18	22	28
鎖緊裝置 (油壓) Clamping device (Hydraulic)		kg/cm ²	35	35	35
最小分割角度 Min. indexing degree		degree	0.001°	0.001°	0.001°
分割精度 (累積值) Indexing accuracy (accumulative)		arc sec	15"	15"	7.5"
重現精度 Repeatability		arc sec	±2"	±2"	±2"
最高轉速 Max. rotation speed	轉盤 Table	rpm	11.1	8.3	2.77
	馬達 Motor	rpm	2000	2000	2000
伺服馬達 (選配) Servo motor (optional)	發那科 FANUC		α12i / α22i	α22i	α22i
總齒數比 Gear ratio			1/180	1/240	1/720
容許切削扭力 Permissible cutting torque		kg	420	700	1000
容許積載荷重 Load Capacity		kg	800	1500	10000
淨重 Net weight		kg	950	1400	4010