
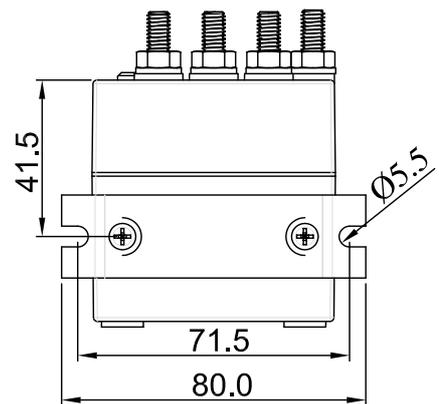

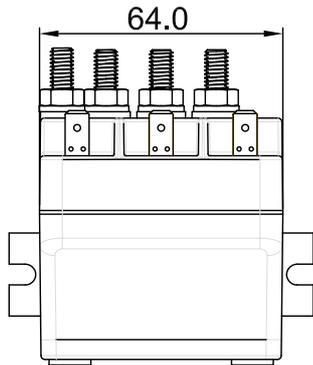


電磁開關

CS 2005

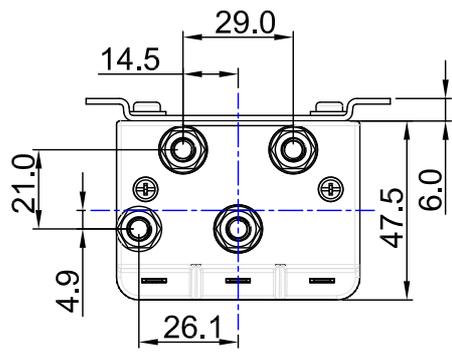

| 總重量 (g) | | 通電率 | 100% | 50% | 25% | 10% | |
|------------|--------|----------|--------|------|------|------|------|
| 軸心重量 (g) | | 通電時間 (秒) | ∞ | 250 | 120 | 40 | |
| 型號 | 阻抗 (Ω) | 消耗電力 (W) | 23 | 46 | 93 | 238 | |
| CS 2005-06 | 1.55 | 輸入條件 | 電壓 (V) | 6.0 | 8.4 | 12.0 | 19.2 |
| | | | 電流 (A) | 3.9 | 5.4 | 7.7 | 12.4 |
| CS 2005-12 | 6.2 | | 電壓 (V) | 12.0 | 16.8 | 24.0 | 38.4 |
| | | | 電流 (A) | 1.9 | 2.7 | 3.9 | 6.2 |
| CS 2005-24 | 24.8 | | 電壓 (V) | 24.0 | 33.6 | 48.0 | 76.8 |
| | | | 電流 (A) | 1.0 | 1.4 | 1.9 | 3.1 |
| CS 2005-48 | 99.2 | | 電壓 (V) | 48 | 67 | 96 | 154 |
| | | | 電流 (A) | 0.5 | 0.7 | 1.0 | 1.5 |