



電腦數控分度盤 CNC Rotary Table

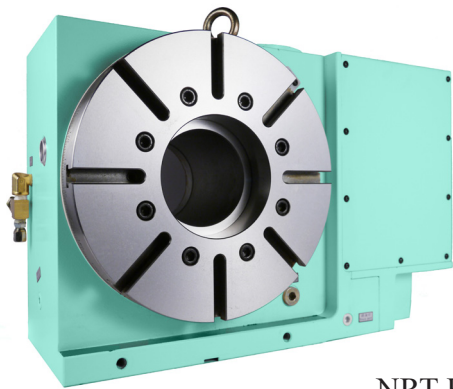


NRT-B321RV

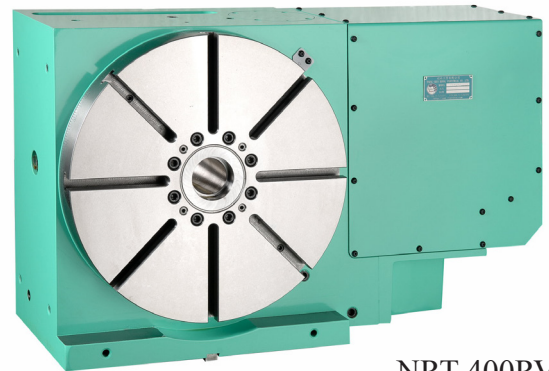


NRT-400RV

型式 Model			NRT-B251R	NRT-B321RV	NRT-B401RV
盤面直徑 Table diameter		mm	Ø 250	Ø 320	Ø 400
基準中心孔 Center bore		mm	Ø 100 H7	Ø 135 H7	Ø 180 H7
主軸中心穿透孔 Diameter of center through hole		mm	Ø 70	Ø 110	Ø 150
垂直放置中心高 Center height (vertically)		mm	170	210	250
水平放置總高 Overall height (horizontally)		mm	180	230	250
T 型槽寬度 Width of T-slot		mm	12 H7	14 H7	14 H7
基準導槽寬 Width of Guide block		mm	18 H7	18 H7	18 H7
鎖緊裝置 (油壓) Clamping device (Hydraulic)		kg/cm ²	35	35	35
最小分割角度 Min. indexing degree		degree	0.001°	0.001°	0.001°
分割精度 (累積值) Indexing accuracy (accumulative)		arc sec	15"	15"	15"
重現精度 Repeatability		arc sec	±2"	±2"	±2"
鎖緊扭力 Clamping torque		kg-m	100	200	300
最高轉速 Max. rotation speed	轉盤 Table	rpm	16.6	16.6	11.1
	馬達 Motor	rpm	2000	2000	2000
伺服馬達 (選配) Servo motor (optional)	發那科 FANUC		α4i / α8i	α12i	α12i
	三菱 MITSUBISHI		HF-104T	HF-204T	HF-204T
	西門子 SIEMENS		1FK7053	1FK7083	1FK7083
	海德漢 HEIDENHAIN		QSY116E	QSY155B	QSY155B
總齒數比 Gear ratio			1/120	1/120	1/180
容許切削扭力 Permissible cutting torque	FxR	 kg-m	50	95	170
容許積載荷重 Load Capacity	0°	 kg	250	400	500
	90°	 kg	100	200	250
淨重 Net weight		kg	80	166	280

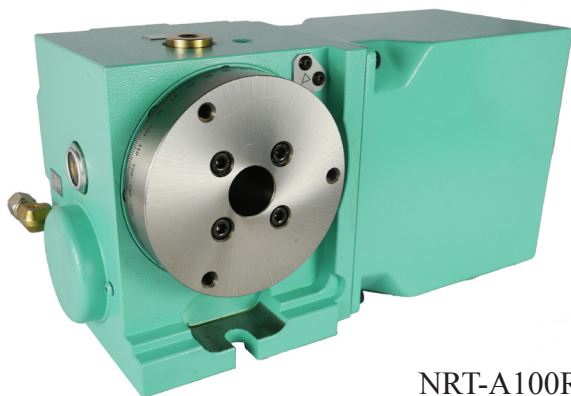

NRT-A100R

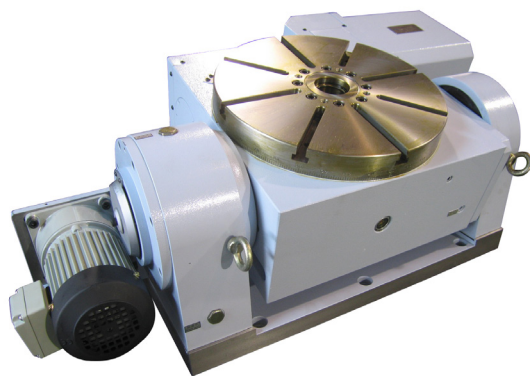

NRT-400TE (特製品)

型式 Model			NRT-B500RV	NRT-B630RV	NRT-B800R
盤面直徑 Table diameter		mm	Ø 500	Ø 630	Ø 800
基準中心孔 Center bore		mm	Ø 210 H7	Ø 270 H7	Ø 400 H7
主軸中心穿透孔 Diameter of center through hole		mm	Ø 182	Ø 240	Ø 320
垂直放置中心高 Center height (vertically)		mm	310	400	885
水平放置總高 Overall height (horizontally)		mm	300	325	370
T 型槽寬度 Width of T-slot		mm	18 H7	18 H7	22 H7
基準導槽寬 Width of Guide block		mm	18 H7	18 H7	x
鎖緊裝置 (油壓) Clamping device (Hydraulic)		kg/cm ²	35	35	35
最小分割角度 Min. indexing degree		degree	0.001°	0.001°	0.001°
分割精度 (累積值) Indexing accuracy(accumulative)		arc sec	15″	15″	15″
重現精度 Repeatability		arc sec	±2″	±2″	±2″
鎖緊扭力 Clamping torque		kg-m	240	420	750
最高轉速 Max. rotation speed	轉盤 Table	rpm	11.1	11.1	8.3
	馬達 Motor	rpm	2000	2000	2000
伺服馬達 (選配) Servo motor (optional)	發那科 FANUC		α12i	α22i	α22i
	三菱 MITSUBISHI		HF-204T	HF-354T	HF-354T
	西門子 SIEMENS		1FK7083	1FK7101	1FK7101
	海德漢 HEIDENHAIN		QSY155B	QSY155D	QSY155D
總齒數比 Gear ratio			1/180	1/180	1/240
容許切削扭力 Permissible cutting torque	F	 kg	2300	2600	3000
	FxR	 kg-m	250	450	750
	FxL	 kg-m	250	400	700
容許積載荷重 Load Capacity	0°	 kg	600	800	1500
	90°	 kg	250	400	700
淨重 Net weight		kg	480	725	1250