


美立固



VM-400NC VM-500NC Vertical Milling Machine

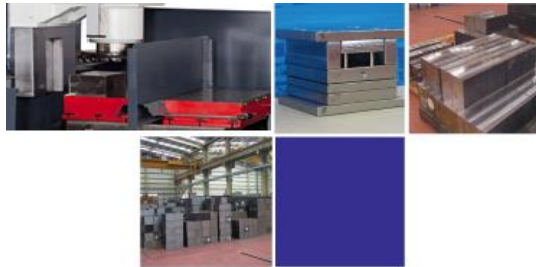

美立固精機廠股份有限公司

PARA MILL PRECISION MACHINERY CO., LTD.

TEL: 886-4-2680-0678. 2680-2524

FAX: 886-4-2680-0587

E-mail: para@paramill.com

Vertical Milling Machine			
Model		VM-400NC	VM-500NC
Cutting capacity	Cutting Width Max	400 mm	500mm
	Cutting Thickness Max	300 mm	
	Cutting Thickness Min	5 mm	
Spindle box & spindle	Distance between spindle nose	70~400 mm	
	Spindle Motor	30 HP	
	Spindle Taper	NT-60	
	Spindle Speed	50~250 rpm	
X-axis (Horizontal) Z-axis (Longitudinal)	Max. horizontal travel(X-axis)	1250 mm	1500 mm
	Max. longitudinal travel (Z-axis)	320mm	
	Servo Motor (X-axis)	2.5kw	
	Servo Motor (Z-axis)	2.5kw	
	Dia. of ball screw (X-axis)	Φ50 P10	
	Dia. of ball screw (Z-axis)	Φ50 P10	
	Rapid (X-axis)	8 m/min	
	Rapid feed (Z-axis)	6 m/min	
Work table (Magnetic)	Worktable area (Single)	400 × 800(mm)	480 × 900(mm)
Index table	Dimensions	1000 × 1000 (mm)	1100 × 1100 (mm)
Oil tank capacity	Hydraulic unit	100 L	
	Lubrication oil tank	2L × 3	
Machine dimension	W × L	3600×4500(mm)	
N.W		8 ton	8.5 ton