
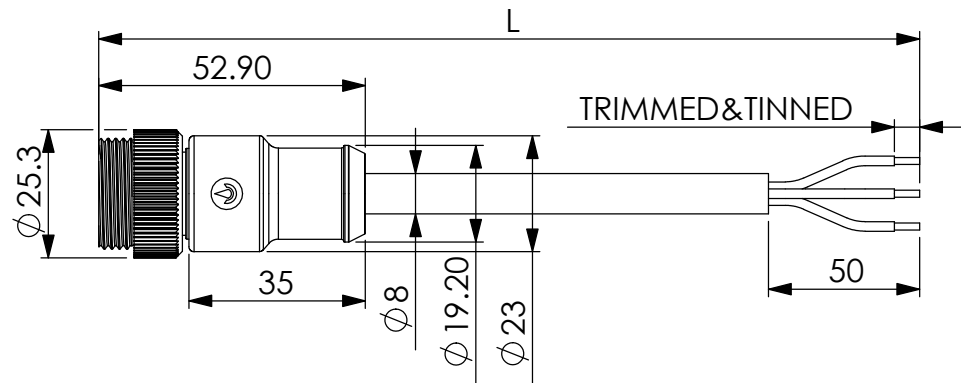


### Contact assignment :

- Black ————— 1
- Blue ————— 2
- Brown ————— 3
- White ————— 4



### TECHNICAL SPECIFICATION :

**Connector locking system :** screw 7/8"-16UN  
**Termination :** solder  
**Wire gauge :** AWG 16  
**Cable outlet :** 8.0mm  
**Degree of protection :** IP68  
**Mechanical operation :** > 100 mating cycles  
**Upper temperature :** +80°C  
**lower temperature :** - 25°C  
**Rated voltage :** 300V  
**Rated current(40°C) :** 9A  
**Contact resistance :** ≤3mΩ

### MATERIALS :

**Contact :** Brass  
**Contact plating :** Nickel 50μ / Gold 10μ  
**Housing :** PBT + 30% GF.  
**Coupling nut :** Brass , Nickel plated  
**Moulding body :** PU




Part No.	Description	Length:L	Cable
CWP2204PMR-02W	-	2M	PU , Black 4 x AWG 16



**俞昌有限公司**  
**YEU TSANG CO. LTD.**

**品名:** WATER PROOF CABLE ASS'Y  
**ITEM:** M22 4P PLUG PU CABLE  
**料號:** PART NO.  
**圖號:** DRW NO.



一般公差  
 .X +/-0.25  
 .XX +/-0.10

SHEET:  
 1  
 1

單位:  
 unit: mm  
 比例:  
 scale: 3 : 2

日期:  
 date: '08/01/23  
 版本:  
 version: V. 1.0

繪圖:  
 drwn by: DanielShyr  
 核准:  
 aprvld by: SkyShyr